

NEWS


Digimatic Plastic Caliper Series 700



700-126

Features:

- Display: LCD4-digit, (-)sign, Character height 7.5mm
- Function: Power ON/OFF, Zero setting, in/mm conversion (700-126)
- Battery: Button type silver oxide cell (SR44).1pc.
- Longevity: 2 years under normal use
- Max response speed: 1,600mm/sec.
- Alarm: Battery voltage low, Overspeed
- Operating temperature: 0 to 40°C,
- Storage temperature: -10 to 60°C
- Without data outout, depth bar.

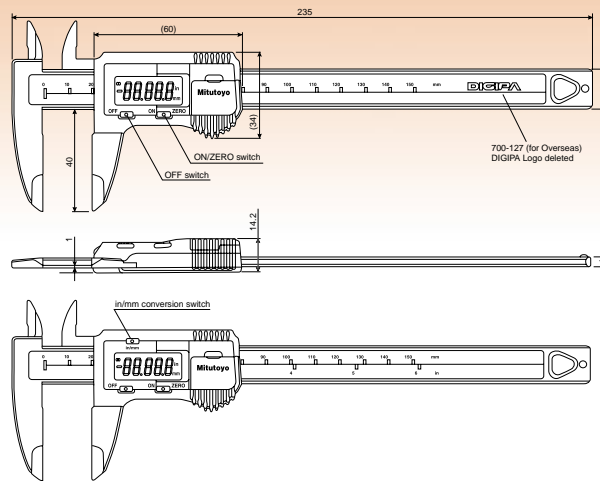

Specifications

Code No.	Range	Resolution	Accuracy	Remarks
700-126	6"/10-150mm	.001"/0.1mm	±.008/±0.2mm	

Distributed By:

Mitutoyo
www.mitutoyo.com

Mitutoyo America Corporation

New Jersey
18 Essex Road
Paramus, NJ 07652
Phone: (201) 368-0525
Fax: 201-343-4969

Michigan
45001 Five Mile Road
Plymouth, MI 48170
Phone: (734) 459-2810
Fax: 734-459-0455

Illinois
965 Corporate Blvd.
Aurora, IL 60504
Phone: (630) 978-5385
Fax: 630-820-7403

California
16925 Gale Ave.
City of Industry, CA 91745
Phone: (626) 961-9661
Fax: 626-333-8019