

INDEX

Linear Gage

Gage Heads / Display Units Selection Guide	G-2,3
Linear Gage LGK	G-4
Linear Gage LGF	G-5
Linear Gage LGF-Z	G-6
Linear Gage LGB-Slim	G-7
Linear Gage LGB2-Slim	G-8,9
Linear Gage LG-Long Range	G-10,11
Linear Gage LGD	G-12,13
Linear Gage LGS	G-14
Linear Gage LGF-High Resolution	G-15
Linear Gage LGB2-High Resolution	G-16
Linear Gage LGH-High Resolution	G-17
Laser Hologage LGH-High Resolution	G-18
EH Counter-Multi Function	G-19
EC Counter-Single-function	G-20
EG Counter-Single-function	G-21
EB Counter-Single-function	G-22
EV Counter-Multi-function	G-23
EV Counter System Configuration	G-24
D-EV Display Unit	G-25
Sensopak Software	G-26
Litematic G-27	G-27

Quick Guide to Precision Measuring Instruments-Linear Gages	G-28,29
---	---------

Mu-checker

Mu-checker Probes	G-30,31
Mu-checker	G-32,33

Laser Scan Micrometer

Laser Scan Micrometer Selection Guide	G-34,35
Laser Scan Micrometer LSM-6902H	G-36
Laser Scan Micrometer LSM-500S	G-37
Laser Scan Micrometer LSM-501S	G-38
Laser Scan Micrometer LSM-503S	G-39
Laser Scan Micrometer LSM-506S	G-40
Laser Scan Micrometer LSM-512S	G-41
Laser Scan Micrometer LSM-516S	G-42
Laser Scan Micrometer LSM-9506	G-43
LSM-6200 Display Unit	G-44
LSM-5200 Display Unit	G-45
Laser Scan Micrometer Optional Accessories	G-46-49
Interface for LSM6200, LSM 6900	G-48
Quick Guide to Precision Measuring Instruments-Laser Scan Micrometers	G-51



Linear Gages



Mu-checker



Laser Scan Micrometers



Linear Gage LGK



**Laser Scan Micrometer
LSM-500S**

Gage Heads / Display Units

		Gage Heads			
		Measuring range			
Resolution		5mm / .2"	10mm / .4"	25mm / .1"	
5nm (0.005µm) 10nm (0.01µm)	Laser Hologage Page G-17 Page G-18		542-715A, 542-716A, 542-720A, 542-721A, (Low measuring force) Page G-17 and G-18		
0.0001mm	LGB series (nut clamp) Page G-8 LGK series Page G-4 LGF series Page G-15	542-246 Refer to page G-16	542-158 542-181 	542-182 	Page G-15
	LG Long Stroke series Page G-11				
0.0005mm	LGK series Page G-4 LGF series Page G-5		542-171 542-157 	542-172 	Page G-5
0.001mm	LGK series Page G-4 LGF series • 0.5µm high-resolution type Page G-5		542-156 542-161 	542-162 	Page G-5
	LGB series (ø8mm Straight) Page G-7	542-204 Refer to page G-7	542-222 (Sine-wave output) 542-222H (High-precision) 542-224 (Low measuring force) 542-230 (air drive) Page G-7		
	Long Stroke series (Motor-drive type) Refer to page G-11				
	LGB series (nut clamp) Page G-8	542-244 Refer to page G-8	542-262 542-262H (High accuracy) 542-264 (Low measuring force) 542-270 (Air drive) Page G-8		
0.005mm	LGF series Page G-5			542-612 	Page G-5
0.0005mm	LGF series Series with reference point mark Page G-6		542-174 	542-175 	Page G-6
0.001mm	LGF series Series with reference point mark Page G-6		542-164 	542-165 	Page G-6
0.01mm	LGD series Page G-12		575-326 	575-327 	Page G-12
	LGS series Page G-14		575-303 		Page G-14

Gage Heads		Display unit		
Measuring range		Point measurement	Calculation measurement (addition and subtraction)	Multi-point measurement
50mm / 2"	100mm / 4"			
		EH Counter 542-074A 		
			Page G-19	
		EG Counter 542-015 		
			Page G-21	
	542-312 542-316 			
			Page G-10	
542-173 		EB Counter (LGH excluded) 542-092-2 	EH Counter 542-071A 	EV Counter (LGH excluded) 542-063 
			Page G-22	Page G-19
542-163 				Page G-23 and G-24
		EH Counter 542-075A 		
			Page G-19	
	542-332 542-336 	EG Counter 542-015 		
			Page G-21	
542-613 		EG Counter 542-015 		
			Page G-21	
542-176 		EG Counter 542-017 	EH Counter 542-073A 	EV Counter 542-067 
			Page G-21	Page G-23 and G-24
542-166 		EB Counter 542-094-2 		
			Page G-22	
575-328 		EC Counter 542-007A 	EH Counter 542-072A 	EV Counter 542-064 
			Page G-20	Page G-23 and G-24
		EG Counter 542-016 		
			Page G-21	
		EB Counter 542-093-2 		
			Page G-22	

Linear Gage LGK – Slim, Robust

Series 542 — Resolutions: 0.1µm, 0.5µm, 1µm

- Ideal for integration into harsh environments such as automation applications.
- Compact model offers the vibration/shock resistance of the proven LGF series at 1/5 the size compared to LGF-110L-B. Cross-sectional area is approx. 1/5 compared to LGF-110L-B.
- Resolution of each model can be selected from 0.1µm, 0.5µm, or 1µm.
- Excellent sliding durability improved to remain serviceable for at least 15 million cycles (in-house testing).
- Excellent shock resistance, 100g/11 ms (IEC 60068-2-27).

542-158



542-157



542-156



SPECIFICATIONS

Order No.	542-158	542-157	542-156
Measuring range		10mm (.4")	
Resolution	0.1µm (.000005")	0.5µm (.000020")	1µm (.000050")
Measuring accuracy (20°C)	(0.8+L/50) µm (L=mm)		(1.5+L/50) µm (L=mm)
Quantizing error	±1 count		
Measuring force	Contact point upward	0.7N or less	
	Contact point horizontal	0.75N or less	
	Contact point downward	0.8N or less	
Position detection method	Photoelectric linear encode		
Response speed*1	400mm/s	1500mm/s	
Output signal	90° phase difference, differential square wave (RS-422A equivalent), minimum edge intervals: 200ns for 0.1µm model, 200ns for 0.5µm model, 400ns for 1µm model		
Output signal pitch	0.4µm	2µm	4µm
Mass	Approx. 175g		
Dust/water resistance*2	Equivalent to IP66 (only gage head)		
Contact point	ø3mm carbide-tipped (fixing screw: M2.5 (P=0.45)×5), standard contact point No.901312		
Stem dia.	ø8mm		
Bearing type	Linear ball bearing		
Output cable length	2m (directly from casing)		
Connector	Plug: RM12BPE-6PH (HIROSE), Compatible receptacle: RM12BRD-6S (HIROSE)		
Operating temperature (humidity) range	0 to 40°C (RH 20 to 80%, no condensation)		
Storage temperature (humidity) range	-10 to 60°C (RH 20 to 80%, no condensation)		
Standard Accessories	Wrench for contact point: No.538610		
Remarks	Gold banded	Blue banded	Green banded


*1: When the spindle speed exceeds 1500mm/s (400mm/s for 0.1µm model), an alarm signal will be output. Also, if using Mitutoyo counter, an error message will be displayed. If using counters made by other companies, please inquire separately for the alarm signals. For the models of 0.1µm resolution, note that over-speed error may occur depending on the impact amount when releasing the contact point freely.

*2: IP Code is a standard which classifies and rates the degree of protection provided against the intrusion of solid objects and water. This may not be applicable depending on the kind of liquid.


DIMENSIONS

Unit: mm


542-158

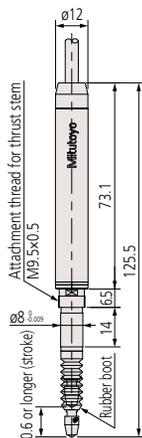


542-157

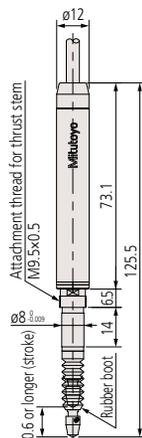

542-156

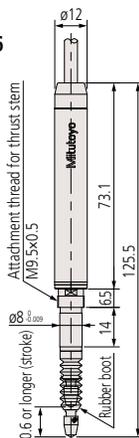

Connector

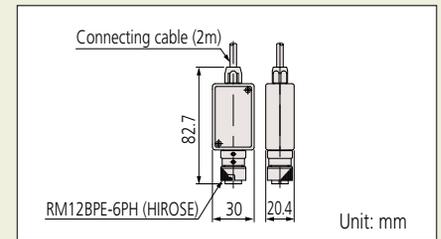

Optional Accessories

- Air lifter 10: **No.02ADE230**
- * Required air pressure: 0.2 to 0.4MPa
- * Spindle extends when air is supplied.



- Rubber boot: **No.238772** (spare)
- Thrust stem set: ***No.02ADB680**
- Thrust stem: **No.02ADB681**
- Clamp nut: **No.02ADB682**
- Spanner wrench: **No.02ADB683**
- * A thrust stem set is a combination of thrust stem and a clamp nut. A special spanner is required for tightening. If using multiple gages, a thrust stem set for each gage and one special spanner are required.

Extension cable (5m): **902434**

Extension cable (10m): **902433**

Extension cable (20m): **902432**

Applicable Counters

542-075A EH-101P

542-071A EH-102P

64PKA131 EG-101P


64PKA134 EB-11P

64PKA137 EV-16P (not compatible with 542-158)

Linear Gage LGF – Standard Dimensions, Robust

Series 542 – Resolutions: 0.5µm, 1µm, 5µm

Connector



Optional Accessories

- Air drive unit
For 10mm range models: **No.02ADE230**
For 25mm range models: **No.02ADE250**
For 50mm range models: **No.02ADE270**
- * Required air pressure: 0.2 to 0.4MPa
- * Spindle extends when air is supplied.



- Rubber boot (spare)
For 10mm range models: **No.238772**
For 25mm range models: **No.962504**
For 50mm range models: **No.962505**
- Thrust stem set
For 10mm range models: **No.02ADB680**
Thrust stem: **No.02ADB681**
Clamp nut: **No.02ADB682**
For 25/50mm range models: **No.02ADN370**
Thrust stem: **No.02ADN371**
Clamp nut: **No.02ADB692**
- * External dimensions are described in the dimensional drawing of the product.
- * A thrust stem set is a combination of thrust stem and a clamp nut. A special spanner is required for tightening. If using multiple gages, a thrust stem set for each gage and one special spanner are required.
- Spanner wrench
For 10mm range models: **No.02ADB683**
For 25/50mm range models: **No.02ADB693**

- Extension cable (5m): **902434**
- Extension cable (10m): **902433**
- Extension cable (20m): **902432**

Applicable Counters

- 542-075A** EH-101P
- 542-071A** EH-102P
- 64PKA131** EG-101P
- 64PKA134** EB-11P
- 64PKA137** EV-16P (not compatible with 542-158)

- Excellent vibration/shock resistance due to the design of the spindle guide section.
- Sliding durability improved to remain serviceable for at least 15 million cycles (in-house testing).
- Shock resistance, 100g/11ms (IEC 60068-2-27)
- LGF-Z series, which is equipped with reference point mark on the linear encoder (refer to page G-7), and 0.1µm resolution type (refer to page G-16) are also available.

542-171, -161



542-172, -162



542-173, -163



542-612, -613



SPECIFICATIONS


Order No.	542-171	542-161	542-172	542-162	542-612	542-173	542-163	542-613
Measuring range	10mm (.4")		25mm (1")		50mm (2")			
Resolution	0.5µm (.000020")	1µm (.000050")	0.5µm (.000020")	1µm (.000050")	5µm (.0002")	0.5µm (.000020")	1µm (.000050")	5µm (.0002")
Measuring accuracy (20°C) L=arbitrary measuring length (mm)	(1.5+L/50) µm				(7.5+L/50) µm	(1.5+L/50) µm		(7.5+L/50) µm
Quantizing error	±1 count							
Measuring force	Contact point upward	1.0N or less		4.0N or less		4.9N or less		
	Contact point horizontal	1.1N or less		4.3N or less		5.3N or less		
	Contact point downward	1.2N or less		4.6N or less		5.7N or less		
Position detection method	Photoelectric linear encoder							
Response speed*1	1500mm/s							
Output	90° phase difference, differential square wave (RS-422A equivalent), minimum edge intervals: 1000ns for 5µm model, 500ns for 1µm model, 250ns for 0.5µm model							
Output square wave pitch	2µm	4µm	2µm	4µm	20µm	2µm	4µm	20µm
Mass	Approx. 260g		Approx. 300g			Approx. 400g		
Dust/water resistance	Equivalent to IP66 (only gage head)							
Contact point	ø3mm carbide-tipped (fixing screw: M2.5 (P=0.45)×5), standard contact point No.901312							
Stem dia.	ø8mm		ø15mm					
Bearing type	Linear ball bearing							
Output cable length	2m (directly from casing)							
Connector	Plug: RM12BPE-6PH (HIROSE), Compatible receptacle: RM12BRD-6S (HIROSE)							
Operating temperature (humidity) range	0 to 40°C (RH 20 to 80%, no condensation)							
Storage temperature (humidity) range	-10 to 60°C (RH 20 to 80%, no condensation)							
Standard accessories	Wrench for contact point: No.538610			Wrench for contact point: No.04GAA857				

*1: When the spindle speed exceeds 1500mm/s, an alarm signal will be output. Also, if using a Mitutoyo counter, an error message will be displayed. If using counters made by other companies, please inquire separately for the alarm signals. For the models using 50mm stroke gage, note over-speed speed error may occur depending on the impact amount when releasing the contact point freely.


*2: IP Code is a standard which classifies and rates the degree of protection provided against the intrusion of solid objects and water. This may not be applicable depending on the kind of liquid.

DIMENSIONS


542-171, -161



542-172, -162, -612

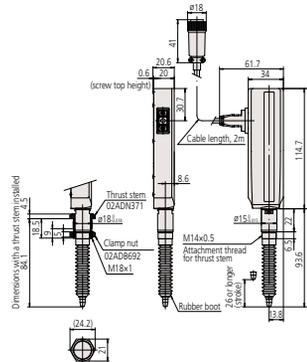

542-173, -163, -613

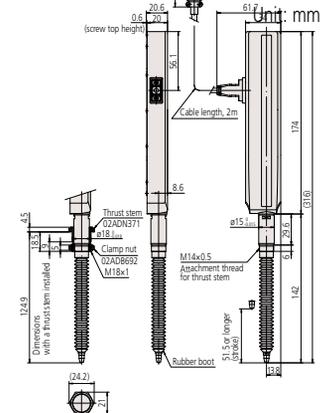

Linear Gage LGF-Z – with Reference Point, Standard Dimensions, Robust

Series 542 — Resolutions: 0.5µm, 1µm

- LGF series with reference point signal output function.
The master setting to use it, incorporated in the unit, is easy to operate. The origin point can be easily detected even when a fault, such as over-speed error, etc. occurs.
- Sliding durability improved to remain serviceable for at least 15 million cycles (in-house testing).
- Shock resistance, 100g/11ms (IEC 60068-2-27).
- Resolutions are available in 0.5µm or 1µm.



SPECIFICATIONS


Order No.	542-174	542-164	542-175	542-165	542-176	542-166
Measuring range	10mm (.4")		25mm (1")		50mm (2")	
Resolution	0.5µm (.000020")	1µm (.000050")	0.5µm (.000020")	1µm (.000050")	0.5µm (.000020")	1µm (.000050")
Measuring accuracy (20°C)	(1.5+L/50)µm (L= measuring length (mm))					
Quantizing error	±1 count					
Measuring force	Contact point upward	1.0N or less	4.0N or less		4.9N or less	
	Contact point horizontal	1.1N or less	4.3N or less		5.3N or less	
	Contact point downward	1.2N or less	4.6N or less		5.7N or less	
Position detection method	Photoelectric linear encoder					
Reference mark position	3mm from contact point tip (lowest rest point)		5mm from contact point tip (lowest rest point)			
Reference mark repeatability (20°C): σ	σ≤0.5µm (at a constant reference point passing speed less than 300mm/s in the same direction)					
Response speed*1	1500mm/s					
Output signal	90° phase difference, differential square wave (RS-422A equivalent), minimum edge intervals: 250ns for 0.5µm model, 500ns for 1µm model					
Output square wave pitch	2µm	4µm	2µm	4µm	2µm	4µm
Mass	Approx. 260g		Approx. 300g		Approx. 400g	
Dust/water resistance*2	Equivalent to IP66 (only gage head)					
Contact point	ø3mm carbide-tipped (fixing screw: M2.5 (P=0.45)×5), standard contact point No.901312					
Stem dia.	ø8mm		ø15mm			
Bearing type	Linear ball bearing					
Output cable length	2m (directly extended from the main unit)					
Connector	Plug: PRC05-P8M (TAJIMI), Compatible receptacle: PRC05-R8F (TAJIMI)					
Operating temperature (humidity) range	0 to 40°C (RH 20 to 80%, no condensation)					
Storage temperature (humidity) range	-10 to 60°C (RH 20 to 80%, no condensation)					
Standard accessories	Wrench for contact point: No.538610			Wrench for contact point: No.04GAA857		
Remarks	w/ origin point mark					

*1: When the spindle speed exceeds 1500mm/s, an alarm will signal. For use of alarm signals, please inquire separately. For models with 50mm stroke, note that over-speed error may occur depending on the impact amount when releasing the contact point freely.


*2: IP code is a standard which classifies and rates the degree of protection provided against the intrusion of solid objects and water. This may not be applicable depending on the kind of liquid.

DIMENSIONS


542-174, -164



542-175, -165




542-176, -166

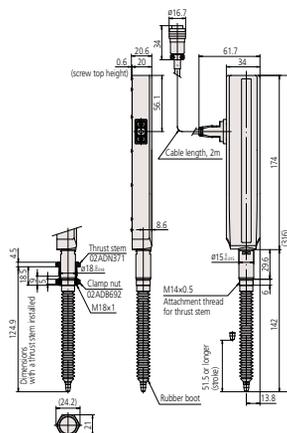

Unit: mm

Connector

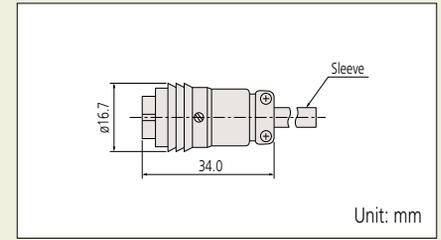

Optional Accessories

- Air drive unit
For 10mm range models: **No.02ADE230**
For 25mm range models: **No.02ADE250**
For 50mm range models: **No.02ADE270**
- * Required air pressure: 0.2 to 0.4MPa
- * Spindle extends when air is supplied.



- Rubber boot (spare)
For 10mm range models: **No.238772**
For 25mm range models: **No.962504**
For 50mm range models: **No.962505**
- Thrust stem set
For 10mm range models: **No.02ADB680**
Thrust stem: **No.02ADB681**
Clamp nut: **No.02ADB682**
For 25/50mm range models: **No.02ADN370**
Thrust stem: **No.02ADN371**
Clamp nut: **No.02ADB692**
- * External dimensions are described in the dimensional drawing of the product.
- * Thrust stem set is a combination of thrust stem and a clamp nut. A special spanner is required for tightening. If using multiple gages, a thrust stem set for each gage and one special spanner are required.
- Spanner wrench
For 10mm range models: **No.02ADB683**
For 25/50mm range models: **No.02ADB693**

Extension cable (5m): **02ADF260**
Extension cable (10m): **02ADF280**
Extension cable (20m): **02ADF300**

Applicable Counters

542-073A EH-102Z
64PKA133 EG-101Z
64PKA136 EB-11Z
64PKA139 EV-16Z

Linear Gage LGB - Slim

Series 542 — Resolution: 1µm

Optional Accessories

- Rubber boot (spare)
For 5mm range models: **No.238773**
For 10mm range models: **No.238772**
- Extension cable (5m): **902434**
- Extension cable (10m): **902433**
- Extension cable (20m): **902432**

Applicable Counters

- 542-075A** EH-101P
- 542-071A** EH-102P
- 64PKA131** EG-101P
- 64PKA134** EB-11P
- 64PKA137** EV-16P
- 542-074A** EH-1025 (for sine wave gages only)

- Compact form (ø8mm straight stem) is an optimal choice as a built-in type sensor.
- The spindle guide uses high-precision linear ball bearings for extremely smooth

- movement and exceptional durability.
- Nut clamp type is also available (LGB2: refer to page G-9).



SPECIFICATIONS

Type	L-shaped	Straight		Low measuring force	Air-driven contact point *1
Order No.	542-204	542-222	542-222H	542-224	542-230 *2
Measuring range	5mm (.2")	10mm (.4")			
Resolution	1µm (.000050")				
Measuring accuracy (20°C)	2µm	1µm			2µm
Quantizing error	±1 count				
Measuring force*4	Contact point upward	Approx. 0.55N or less	Approx. 0.7N or less	Approx. 0.5N or less	Approx. 0.7N or less
	Contact point horizontal	Approx. 0.6N or less	Approx. 0.75N or less	Approx. 0.55N or less	Approx. 0.45N or less
	Contact point downward	Approx. 0.65N or less	Approx. 0.8N or less	Approx. 0.6N or less	Approx. 0.8N or less
Protection level	Equivalent to IP54 (only gage head)				
Mass	145g	150g			165g

*1: Required air pressure: 0.3 to 0.4MPa

*2: Spindle extends when air is supplied.

*3: Spindle retracts when air is supplied.

*4: Depends on the settings of the connected counter. Potential resolution down to 1µm.

Slim-head low-measuring force series (made to order)


- Low measuring force, suitable for measurement of soft material workpieces.

Model	LGB-105L-1	LGB-110A-1/LGB-110AR-1*2
Measuring range	5mm	10mm
Resolution	1µm	1µm
Measuring force*1	Contact point upward	Approx. 0.4N or less
	Contact point horizontal	Approx. 0.45N or less
	Contact point downward	Approx. 0.5N or less

*1: Measuring force at the retraction of the spindle



*2: The "R" suffix indicates air retracted spindle

The LGB-□□□-1 is a low measuring force model. Depending on the operating method, the spindle forward speed may become slow compared to the standard model. Please check if this restriction is compatible with the application. Please contact Mitutoyo to verify the application.

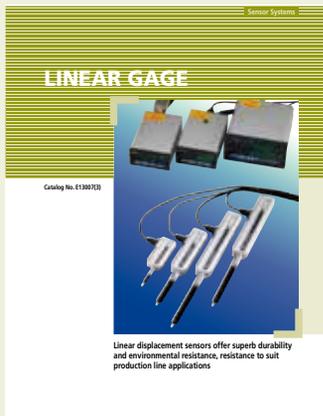

Refer to No. (E13007) for more details.

Connector

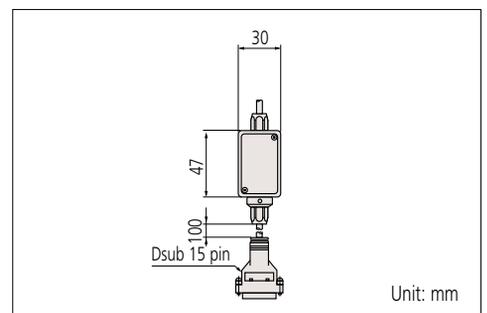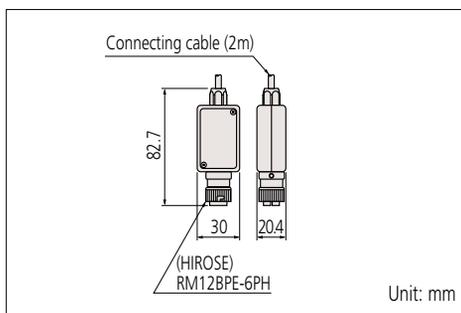

External dimensions: refer to page G-9.

Linear Gage LGB2 – Slim, w/Clamp Nut

Series 542 — Resolution: 1µm

- Slim design, nut clamp type (Stem dia. is ø9.5mm)
- The spindle guide uses high precision linear ball bearings for extremely smooth movement and exceptional durability.

542-244



542-262/542-262H

542-264



542-270



SPECIFICATIONS

Type	L-shaped	Straight		Low measuring force	Air-driven contact point*1
Order No.	542-244	542-262	542-262H	542-264	542-270*2
Measuring range	5mm (.2")			10mm (.4")	
Resolution				1µm (.000050")	
Measuring accuracy (20°C)	2µm		1µm	2µm	
Maximum response speed	900mm/s				
Measuring force	Contact point upward	Approx. 0.55N or less	Approx. 0.7N or less	Approx. 0.5N or less	Approx. 0.7N or less
	Contact point horizontal	Approx. 0.6N or less	Approx. 0.75N or less	Approx. 0.55N or less	Approx. 0.75N or less
	Contact point downward	Approx. 0.65N or less	Approx. 0.8N or less	Approx. 0.6N or less	Approx. 0.8N or less
Protection level*4	IP54			IP54	
Mass	160g	170g		170g	

*1: Required air pressure: 0.3 to 0.4MPa

*2: Spindle extends when air is supplied.

*3: Depends on the settings of the connected counter. Potential resolution down to 1µm.

*4: IP code is a standard which classifies and rates the degree of protection provided against the intrusion of solid objects and water. This may not be applicable depending on the type of liquid.

Slim head low measuring force series (made to order)

- Low measuring force, suitable for measurement of soft-material workpieces.

Model	LGB2-105L-1	LGB2-110AR-1	
Measuring range	5µm	10µm	
Resolution	1µm	1µm	
Measuring force*	Contact point upwards	Approx. 0.4N or less	Approx. 0.5N or less
	Contact point horizontal/ Contact point upwards	Approx. 0.45N or less	Approx. 0.55N or less
	Contact point downwards	Approx. 0.5N or less	Approx. 0.6N or less

* Measuring force at the retraction of the spindle

The LGB2-□□□-1 is a low measuring force model. Depending on the operating method, the spindle forward speed may become slow compared to the standard model. Please check if this restriction is compatible with the application. Please contact Mitutoyo to verify the application


Optional Accessories

- Rubber boot (spare)
For 5mm range models: **No.238773**
For 10mm range models: **No.238772**
- Extension cable (5m): **902434**
- Extension cable (10m): **902433**
- Extension cable (20m): **902432**

Applicable Counters

- 542-075A** EH-101P
- 542-071A** EH-102P
- 64PKA131** EG-101P
- 64PKA134** EB-11P
- 64PKA137** EV-16P
- 542-074A** EH-1025 (for sine wave gages only)

Connector

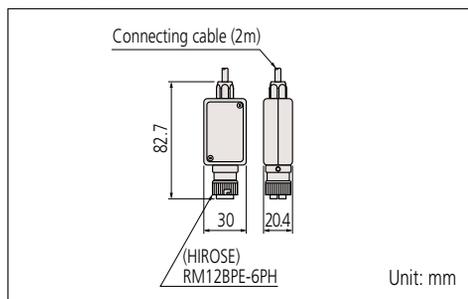

External dimensions: refer to page G-9.

Linear Gage LGB2 – Slim

Series 542 — Resolution: 1µm


Applicable Counters

542-075A	EH-101P
542-071A	EH-102P
64PKA131	EG-101P
64PKA134	EB-11P
64PKA137	EV-16P
542-074A	EH-1025 (for sine wave gages only)


DIMENSIONS

Unit: mm


542-204




542-222/No.542-222H 542-224




542-230

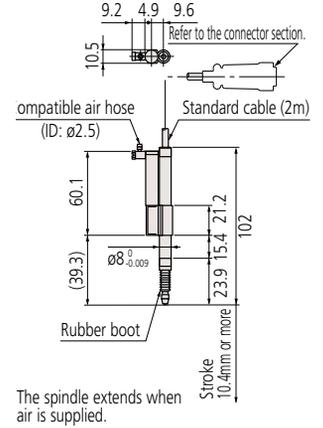


542-244



542-262/542-262H

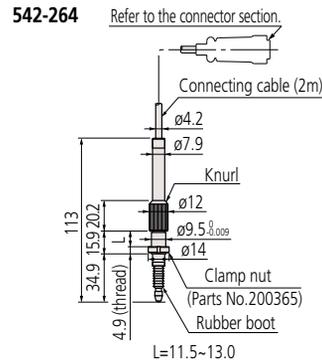

542-270

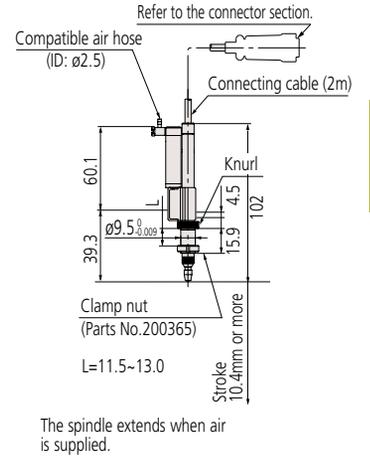

Refer to No. (E13007) for more details.

Linear Gage LG – Long Range

Series 542 — Resolutions: 0.1µm, 1µm

- A series to cover maximum measuring range, 100mm.
- Three versions are available; standard model, low measuring force model, and rubber boot type (made to order).
- The resolution of each model can be selected from 0.1µm and 1µm.



IP 54

542-312


SPECIFICATIONS

Type	Standard spar type	Low measuring force	Rubber boot type	Standard spar type	Low measuring force	Rubber boot type
Order No.	542-312	542-316	542-314	542-332	542-336	542-334
Measuring range	100mm (4")					
Resolution	0.1µm (.000005")			1µm (.000050")		
Measuring accuracy (20°C)	(2+L/100)µm ≤ 2.5µm L= measuring length (mm)			(2.5+L/100)µm ≤ 3µm L= measuring length (mm)		
Quantizing error	±1 count					
Measuring force	Contact point downward	Approx. 8.0N or less	Approx. 3.0N or less	Approx. 8.0N or less	Approx. 8.0N or less	Approx. 3.0N or less
	Contact point horizontal	Approx. 6.5N or less	—	Approx. 6.5N or less	Approx. 6.5N or less	—
	Contact point upward	Approx. 5.0N or less	—	Approx. 5.0N or less	Approx. 5.0N or less	—
Position detection method	Photoelectric linear encoder					
Response speed*1 (max. electrical response speed)	Approx. 400mm/s			Approx. 800mm/s		
Output signal	90° phase difference, differential squarewave (RS-422A equivalent)					
Spindle drive	Helical extension spring					
Spindle guide	Bearing guide					
Stem diameter	ø20mm					
Contact point	ø3mm carbide-tipped (fixing screw: M2.5 (P=0.45)×5) Standard contact point No.901312					
Shock resistance	60g (in-house testing)					
Cable length	Approx. 2m (directly extended from the gage unit)					
Spindle sealing method	Scraper type		Rubber boot type	Scraper type		Rubber boot type
Dust/water resistance*2	Equivalent to IP54		Equivalent to IP66	Equivalent to IP54		Equivalent to IP66
Operating temperature (humidity) range	0 to 40°C (RH 20 to 80%, no condensation)					
Storage temperature (humidity) range	-10 to 60°C (RH 20 to 80%, no condensation)					
Input/output connector	For calculation: RM12BPE-6PH (HIROSE) Compatible receptacle: RM12BRD-6S (HIROSE)					
Mass (including cables)	Approx. 750g		Approx. 780g	Approx. 750g		Approx. 780g
Standard accessories	Wrench for contact point: No.04GAA857 Hexagon socket head cap screw, M4×0.7×35, 2 pcs. (for gage fixing) Round flat washer, nominal 4, 2 pcs. (for gage fixing) Lifting clip: No.137693 Fixing holder: 02ADG181 (for fixing lifting lever)					
Remarks	Standard	Low measuring force	w/ rubber boot	Standard	Low measuring force	w/ rubber boot

*1: Note that over-speed error may occur depending on the indentation amount when releasing the contact point freely after indentation.

*2: IP code is a standard which classifies and rates the degree of protection provided against the intrusion of solid objects and water. This may not be applicable depending on the kind of liquid. (Only gage head)

Lifting clip attachment

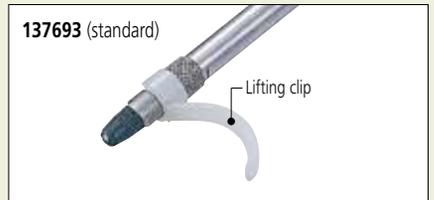

Optional Accessories

- Rubber boot: **02ADA004** (for rubber boot type)

Extension cable (5m): **902434**

Extension cable (10m): **902433**

Extension cable (20m): **902432**

Applicable Counters

For **542-312, 542-316, 542-314**

542-075A EH-101P

542-071A EH-102P

64PKA131 EG-101P

64PKA134* EB-11P

For **542-332, 542-336, 542-334**

542-075A EH-101P

542-071A EH-102P

64PKA131 EG-101P

64PKA134* EB-11P

64PKA137* EV-16P

* Not for use with 0.1µm resolution gages.


Linear Gage LG – Long Range

Series 542 — Resolutions: 0.1µm, 1µm

DIMENSIONS

542-312, -316, -332, -336


Unit: mm

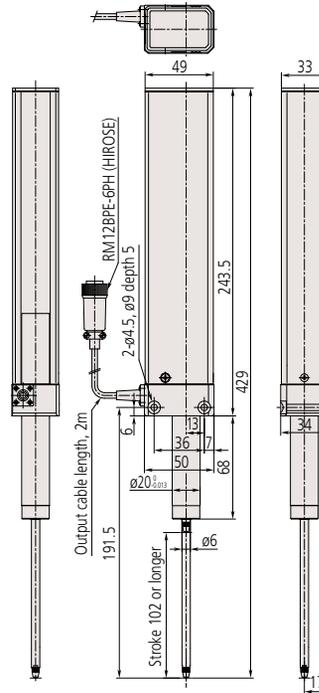

Refer to No. (E13007) for more details.

542-314, -334

Unit: mm

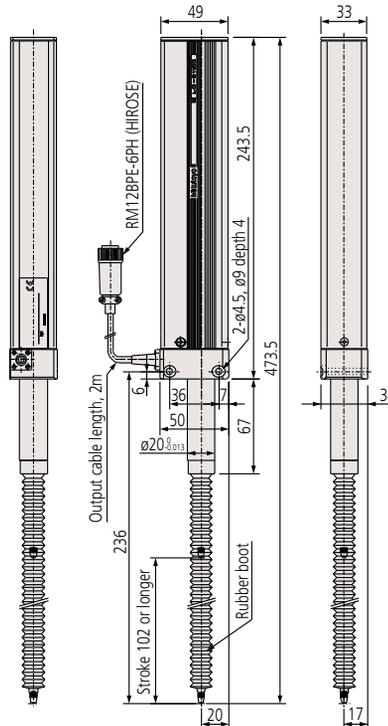

Linear Gage LGD – Absolute, Standard Dimensions, Robust

Series 575 — Resolution: 10µm

- Absolute position detection makes it possible to maintain the reference point even when the power is switched off.
- Excellent protection against dust and splashing water (IP66) on the factory floor.
- Ultra-compact design enables installation in very tight spaces.
- The spindle guide uses high-precision linear ball bearings for extremely smooth movement and exceptional durability.
- Sliding durability improved to remain serviceable for at least 15 million cycles (in-house testing).
- Shock resistance, 100g/11ms (IEC 60068-2-27)



SPECIFICATIONS

Order No.*1	575-326	575-327	575-328
Measuring range	.4" / 10mm	1" / 25mm	2" / 50mm
Resolution	.0005" / 10µm		
Measuring accuracy (20°C)	.001" / 20µm		30µm
Quantizing error	±1 count		
Measuring force	Contact point upward	1.0N or less	4.0N or less
	Contact point horizontal	1.1N or less	4.3N or less
	Contact point downward	1.2N or less	4.6N or less
Position detection method	ABSOLUTE electrostatic capacitance-type linear encoder		
Response speed	Unlimited (not applicable to scanning measurement)		
Output	Digimatic output		
External input	Reference-setting signal (Absolute reference position*2) can be changed externally.		
Mass*3	Approx. 260g	Approx. 300g	Approx. 400g
Contact point	ø3mm carbide-tipped (fixing screw: M2.5 (P=0.45)×5), standard contact point No.901312		
Stem dia.	ø8	ø15	
Bearing type	Linear ball bearing		
Dust/water resistance*4	Equivalent to IP66 (only gage head)		
Output cable length (directly extended from the main unit)	2m, 3m, 5m, 7m		
Operating temperature (humidity) range	0 to 40°C (RH 20 to 80%, no condensation)		
Storage temperature(humidity) range	-10 to 60°C (RH 20 to 80%, no condensation)		
Standard Accessories	Wrench for contact point: No.538610	Wrench for contact point: No.04GAA857	

*1: The last number of the Code No. represents special cable length. (meters)


*2: The absolute reference point is near the lowest rest point at shipment.

*3: Mass including 2m cable.

*4: IP code is a standard which classifies and rates the degree of protection provided against the intrusion of solid objects and water. This may not be applicable depending on the type of liquid.

ABSOLUTE™

Connector

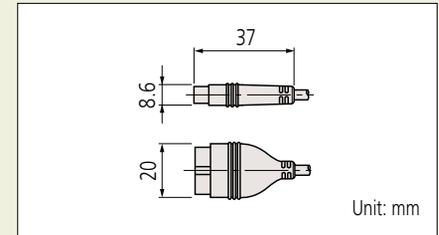

Optional Accessories

- Air drive unit
 - For 10mm range models: **No.02ADE230**
 - For 25mm range models: **No.02ADE250**
 - For 50mm range models: **No.02ADE270**
- * Required air pressure: 0.2 to 0.4MPa
- * Spindle extends when air is supplied.
- Rubber boot (spare)
 - For 10mm range models: **No.238772**
 - For 25mm range models: **No.962504**
 - For 50mm range models: **No.962505**
- Thrust stem set
 - For 10mm range models: **No.02ADB680**
 - Thrust stem: **No.02ADB681**
 - Clamp nut: **No.02ADB682**
 - For 25/50mm range models: **No.02ADN370**
 - Thrust stem: **No.02ADN371**
 - Clamp nut: **No.02ADB692**
- * External dimensions are described in the dimensional drawing of the product.
- * Thrust stem set is a combination of thrust stem and a clamp nut. A special spanner is required for tightening. If using multiple gages, a thrust stem set for each gage and one special spanner are required.
- Spanner wrench
 - For 10mm range models: **No.02ADB683**
 - For 25/50mm range models: **No.02ADB693**

SPC cable extension adapter: **02ADF640**

Extension cable (0.5m): **02ADD950**

Extension cable (1m): **936937**

Extension cable (2m): **965014**

*when connecting an extension cable, an SPC cable extension adapter is required (02ADF640)

Power supply and origin setter **21EZA345A**

Digimatic cable extension adapter **02ADF640**



Applicable Counters


- 542-007A** EC-101D Counter, 120V
- 64PKA132** EG-101D
- 64PKA135** EB-11D
- 542-072A** EH-102D
- 542-064** EV-16D COUNTER

Linear Gage LGD – Absolute, Standard Dimensions, Robust

Series 575 — Resolution: 10 μ m


DIMENSIONS

575-326

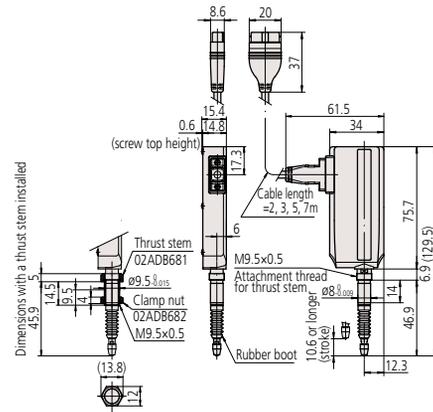


575-328

Unit: mm

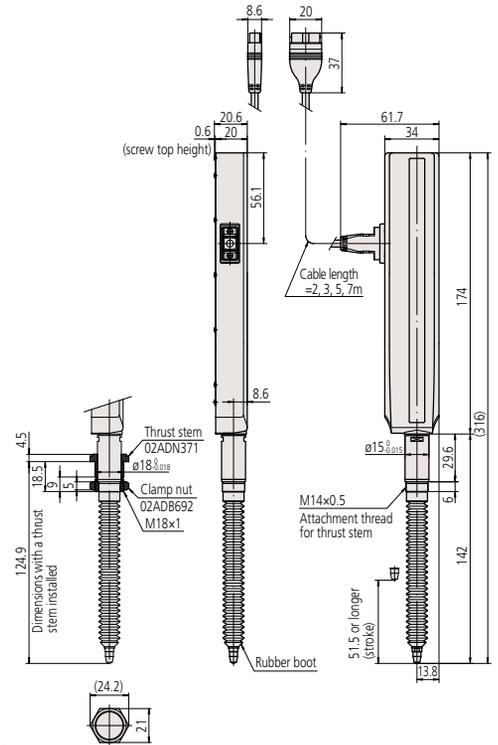

575-327

LGD®-1025L-B, -1025L/3-B, -1025L/5-B, -1025L/7-B

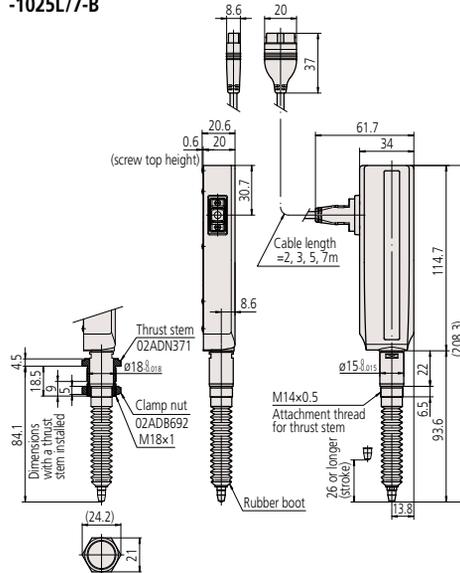

Applicable Counters

- 542-007A EC-101D Counter, 120V
- 64PKA132 EG-101D
- 64PKA135 EB-11D
- 542-072A EH-102D
- 64PKA138 EV-16D COUNTER

3D models available on request.

Linear Gage LGS – Absolute

Series 575 — Resolution: 10µm

575-303

IP66



- ABSOLUTE electrostatic capacitance-type encoder makes it possible to maintain the reference point even when the power is switched off.
- Excellent protection against dust and splashing water (IP66) on the factory floor.

SPECIFICATIONS

Metric		
Order No.	575-303	
Measuring range	12.7mm	
Resolution	10µm	
Measuring accuracy (20°C)	15µm	
Quantizing error	±1 count	
Measuring force	Contact point upward	1.6N or less
	Contact point horizontal	1.8N or less
	Contact point downward	2N or less
Position detection method	ABSOLUTE electrostatic capacitance-type linear encoder	
Response speed	Unlimited (not applicable to scanning measurement)	
Output	Digimatic output	
Mass	Approx. 190g	
Contact point	ø3mm carbide-tipped (fixing screw: M2.5 (P=0.45)×5) Standard contact point No.901312	
Stem dia.	ø8mm	
Bearing type	Slide bearing	
Dust/water resistance	Equivalent to IP66 (only gage head)	
Output cable length	2m (directly extended from the main unit)	
Operating temperature (humidity) range	0 to 40°C (RH 20 to 80%, no condensation)	
Storage temperature (humidity) range	-10 to 60°C (RH 20 to 80%, no condensation)	


* IP code is a standard which classifies and rates the degree of protection provided against the intrusion of solid objects and water. This may not be applicable depending on the type of liquid.

Inch		
Order No.	575-313	
Measuring range	.5"	
Resolution	.0005"	
Measuring accuracy (20°C)	.0008"	
Quantizing error	±1 count	
Measuring force	Contact point upward	1.6N or less
	Contact point horizontal	1.8N or less
	Contact point downward	2N or less
Position detection method	ABSOLUTE electrostatic capacitance-type linear encoder	
Response speed	Unlimited (not applicable to scanning measurement)	
Output	Digimatic output	
Mass	Approx. 190g	
Contact point	ø3mm carbide-tipped (fixing screw: M2.5 (P=0.45)×5) Standard contact point No.901312	
Stem dia.	ø9.52=3/8"	
Bearing type	Slide bearing	
Dust/water resistance	Equivalent to IP66 (only gage head)	
Output cable length	2m (directly extended from the main unit)	
Operating temperature (humidity) range	0 to 40°C (RH 20 to 80%, no condensation)	
Storage temperature (humidity) range	-10 to 60°C (RH 20 to 80%, no condensation)	

* IP code is a standard which classifies and rates the degree of protection provided against the intrusion of solid objects and water. This may not be applicable depending on the type of liquid.

ABSOLUTE™

Connector

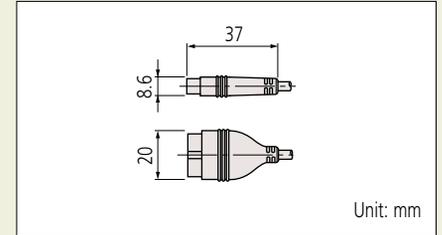

Unit: mm

Optional Accessories

- Rubber boot: **No.238774** (spare)
- Air drive unit (metric): **No.903594**
- Air drive unit (inch): **No.903598**
- SPC cable extension adapter: **No.02ADF640**
- Extension cable (0.5m): **No.02ADD950**
- Extension cable (1m): **No.936937**
- Extension cable (2m): **No.965014**
- Power supply and origin setter **21EZA345A**

* When connecting an extension cable, an SPC cable extension adapter is required. (**02ADF640**)


Digimatic cable extension adapter 02ADF640



Applicable Counters

- 542-007A** EC-101D Counter, 120V
- 64PKA132** EG-101D
- 64PKA135** EB-11D
- 542-072A** EH-102D
- 64PKA138** EV-16D COUNTER

DIMENSIONS

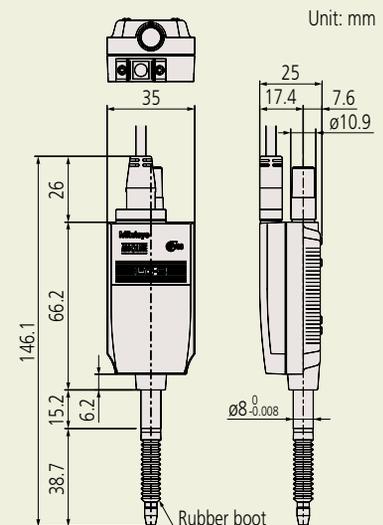


Unit: mm

Linear Gage LGF – High Resolution, Standard Dimensions, Robust

Series 542 — Resolution: 0.1 μm

Connector

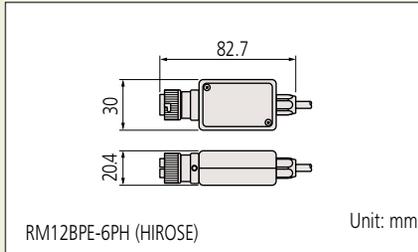

Optional Accessories

- Rubber boot (spare)
 - For 10mm range models: **No.238772**
 - For 25mm range models: **No.962504**
 - For 50mm range models: **No.962505**
- Thrust stem set
 - For 10mm range models: **No.02ADB680**
 - Thrust stem: **No.02ADB681**
 - Clamp nut: **No.02ADB682**
 - For 25mm range models: **No.02ADN370**
 - Thrust stem: **No.02ADN371**
 - Clamp nut: **No.02ADB692**
- * External dimensions are described in the dimensional drawing of the product.
- * Thrust stem set is a combination of thrust stem and a clamp nut. A special spanner is required for tightening. If using multiple gages, a thrust stem set for each gage and one special spanner are required.
- Wrench
 - For 10mm range models: **No.02ADB683**
 - For 25mm range models: **No.02ADB693**
- Extension cable (5m): **902434**
- Extension cable (10m): **902433**
- Extension cable (20m): **902432**
- Air drive unit
 - For 10mm range models: **No.02ADE230**
 - For 25mm range models: **No.02ADE250**
 - For 50mm range models: **No.02ADE270**
- * Required air pressure: 0.2 to 0.4MPa
- * Spindle extends when air is supplied.

Applicable Counters

- 542-075A** EH-101P
542-071A EH-102P

- 0.1 μm resolution type of reliable LGF series gage.

- Excellent protection against dust and splashing water (IP66) on the factory floor.

542-181
IP66



542-182
IP66



SPECIFICATIONS


Order No.	542-181	542-182
Measuring range	10mm (.4")	25mm (1")
Resolution	0.1 μm (.000005")	
Measuring accuracy (20°C)	(0.8+L/50) μm (L=arbitrary measuring length (mm))	
Quantizing error	± 1 count	
Measuring force	Contact point upward	1.0N or less
	Contact point horizontal	1.1N or less
	Contact point downward	1.2N or less
Position detection method	Photoelectric linear encoder	
Response speed*1	400mm/s	
Output signal	90° phase difference, differential squarewave (RS-422A equivalent) Minimum edge-to-edge interval, 200ns	
Output signal pitch	0.4 μm	
Mass	Approx. 310g	Approx. 350g
Dust/water resistance*2	Equivalent to IP66 (only gage head)	
Stylus	$\varnothing 3\text{mm}$ carbide-tipped (fixing screw: M2.5 (P=0.45)×5), standard contact point No.901312	
Stem dia.	$\varnothing 8$	$\varnothing 15$
Bearing type	Linear ball bearing	
Output cable length	2m (directly extended from the main unit)	
Connector	Plug: RM12BPE-6PH (HIROSE), Compatible receptacle: RM12BRD-6S (HIROSE)	
Operating temperature (humidity) range	0 to 40°C (RH 20 to 80%, no condensation)	
Storage temperature (humidity) range	-10 to 60°C (RH 20 to 80%, no condensation)	
Standard accessories	Wrench for contact point: No.538610	Wrench for contact point: No.04GAA857

*1: When the spindle speed exceeds 400mm/s, an alarm will signal. Also, if using a Mitutoyo counter, an error message will be displayed. If using counters made by other companies, please consult your local Mitutoyo office. Note that over-speed error may occur depending on the impact amount when releasing the contact point freely.


*2: IP code is a standard which classifies and rates the degree of protection provided against the intrusion of solid objects and water. This may not be applicable depending on the type of liquid.

DIMENSIONS

542-181

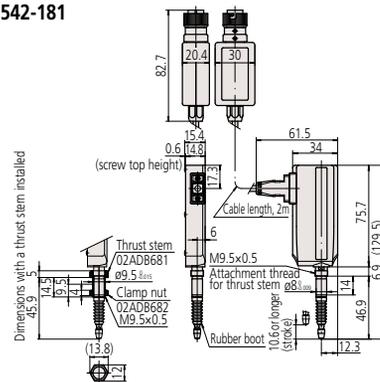

542-182

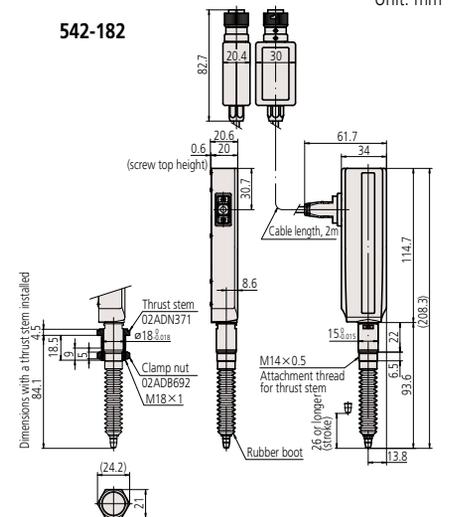

Linear Gage LGB2 – High Resolution, Slim, with Clamp Nut

Series 542 (0.1µm resolution)

- Slim type high-precision linear gage with resolution of 0.1µm. It is an optimal choice as a built-in type sensor.
- High-precision linear ball bearings are used in the spindle guide for extremely smooth movement and exceptional durability.

542-246



Optional Accessories

- Rubber boot: **No.238773** (spare)
- Extension cable (5m): **902434**
- Extension cable (10m): **902433**
- Extension cable (20m): **902432**

Applicable Counters

- 542-075A** EH-101P
- 542-071A** EH-102P


SPECIFICATIONS

Order No.	542-246	
Measuring range	5mm (.2")	
Resolution	0.1µm (.000005")	
Measuring accuracy (20°C)	0.8µm	
Measuring force	Contact point upward	Approx. 0.55 or less
	Contact point horizontal	Approx. 0.6N or less
	Contact point downward	Approx. 0.65 or less
Output signal	90° phase difference, differential square wave (RS-422A equivalent)	
Position detection method	Photoelectric linear encoder	
Response speed	380mm/s	
Mass	160g	
Dust/water resistance*	Equivalent to IP54 (only gage head)	
Contact point	Carbide ball (M2.5x0.45)	Steel ball (4-48UNF)
Stem dia.	ø9.5mm	
Bearing type	Linear ball bearing	
Output cable length	2m	
Connector	Plug: RM12BPE-6PH (HIROSE), Compatible receptacle: RM12BRD-6S (HIROSE)	
Operating temperature (humidity) range	10 to 30°C (RH 20 to 80%, no condensation)	
Standard accessories	Wrench for contact point: No.538610	Wrench for contact point: No.538610 , Stem bushing

*1: IP code is a standard which classifies and rates the degree of protection provided against the intrusion of solid objects and water. This may not be applicable depending on the type of liquid.

DIMENSIONS

Unit: mm

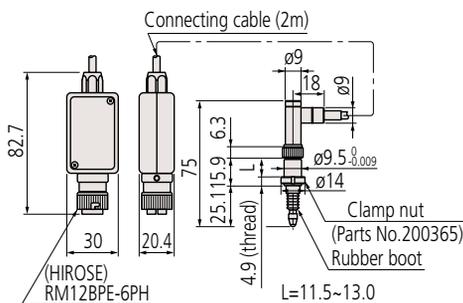



Linear Gage LGH – High Resolution, High Accuracy


SERIES 542 (0.01µm resolution)

Optional Accessories

- LGH stand: **971750**
- Stem fixture for fixing to top surface: **971751**
- Stem fixture for fixing to bottom surface: **971752**
- Spindle lifting cable: **971753**
- Rubber boot: **238772** (spare for **542-715**)
- I/O output connector (with cover): **02ADB440**

DIMENSIONS

Unit: mm

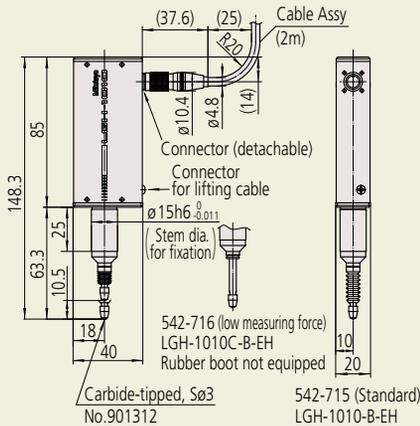

Gage Head

Dedicated Counter

542-715A




SPECIFICATIONS

Linear gage	Standard	Low measuring force
Order No.	542-715A	542-716A
Measuring range	10mm	
Resolution	0.01µm (0.05µm, 0.1µm, 0.5µm, 1µm can be selected from the counter)	
Measuring accuracy (20°C)*	0.2µm	
Repeatability (20°C)*	0.1µm (2σ)	
Retrace error (20°C)*	0.1µm	
Measuring force	Contact point downwards	0.65N or less
	Contact point horizontal	0.55N or less
	Contact point upwards	0.45N or less
Position detection method	Photoelectric reflection type linear encoder	
Detectable operation speed	In normal measurement: 700mm/sec; for peak detection: 120mm/sec	
Mass of gage head	220g (excluding cable of approx. 150g)	
Contact point	Ø3mm carbide-tipped (fixing screw: M2.5 (P=0.45)×5)	
Stem	Ø15mm	
Bearing	Linear ball type	
Output cable length	Approx. 2m	
Operating temperature/humidity	0 to 40°C/RH 20 to 80% (no condensation)	
Storage temperature	-10 to 60°C/RH 20 to 80% (no condensation)	

Counter

Quantizing error	±1 count
Display range	±999.99999mm
Functions	Presetting, tolerance judgment, peak measurement, analog output
Interface	RS-232C/Digimatic/USB (only for SENSORPAK)
Power supply	Supplied AC Adapter, or +12 to 24 V DC, max. 700mA
Current Consumption	8.4W (MAX 700mA) (Ensure at least 1A power supply per unit.)
External dimensions	144(W)×157(D)×75(H)
Mass	Approx. 900g (AC Adapter excluded)
Standard accessories	Wrench for contact point, rubber boot, stand, washer (for counter), AC Adapter, AC cord, DC plug, user's manual, inspection certificate

*Indication accuracy applies when used with counters.

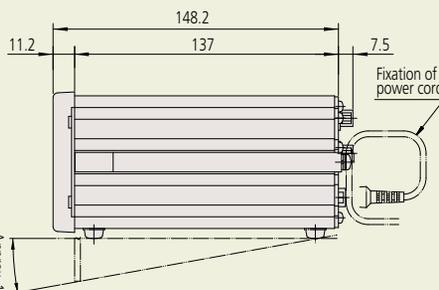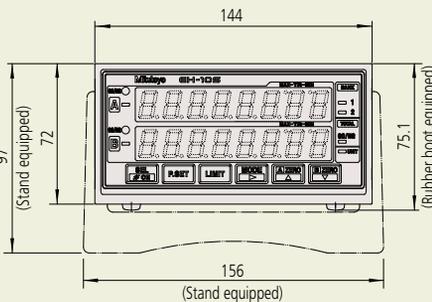

(Tilt angle when stand equipped)
Approx. 10°

Laser Hologage LGH – High Resolution, High Accuracy

Series 542 — Resolution: 0.005 μ m

- The Mitutoyo Laser Hologage is a high-end digital gaging system that employs laser beam interference to make highly accurate and repeatable measurements.
- The compact gage head reduces the cost required for assembling the laser scale unit for each device. The head can also contribute to downsizing the entire system. The master gage is the best tool available for measuring tools or for a length measurement sensor of the control unit, as well as for measuring high-precision components.
- High resolution and high accuracy. Highly accurate measurement due to an ultra-high resolution of 0.000005mm (0.005 μ m), which is close to the performance of laser interferometers.
- Excellent measuring stability. The design is also highly resistant to unfavorable environmental conditions such as air movement and atmospheric pressure changes.
- Low measuring force models are also available. Low measuring force models are available for easily deformed precision workpieces.
- High reliability and excellent durability. High-precision linear ball bearings are used in the spindle guide for extremely smooth movement and exceptional durability.
- 0.005 μ m resolution LGH is for use with counter EH-102S.



SPECIFICATIONS

Code No.		542-720A	542-721A
Configuration		Set of 1-axis gage head and display unit	Set of 1-axis gage head and display unit
Measuring range		10mm	
Resolution		0.005 μ m (.5 microinch)	
Measuring accuracy (20°C)		0.1 μ m*1	
Repeatability (2 σ)		0.02 μ m	
Retrace error		0.05 μ m	
Measuring force	Contact point upward	Approx. 0.65N or less	Approx. 0.12N
	Contact point horizontal	Approx. 0.55N or less	—
	Contact point downward	Approx. 0.45N or less	—
Stylus		\varnothing 3mm carbide-tipped (fixing screw: M2.5 (P=0.45) \times 5), standard contact point No.120058	
Output cable length		2m	
Display range		\pm 99.999995mm	
Minimum reading		0.01 μ m	
Operating temperature (humidity) range		15 to 25°C (RH 30-60%, no condensation) -10 to 60°C (RH 20 to 80%, (no condensation)	
Storage temperature (humidity) range		The temperature and humidity range for storage after unpacking is the same as that for operation.	
Standard accessories		Wrench for contact point: No. 538610 AC adapter: No. 357651 AC cable (USA): No.02ZAA010*	
Mass (gage head + display unit)		1400g	

*1: Indication accuracy applies when used with counters.

Laser Beam Safety Precautions

This system uses a low-power invisible laser beam (780nm) which corresponds to a CLASS 1 (invisible radiation) of IEC 60825-1 for measurement. The CLASS 1 laser warning label as shown below is attached to the main unit.

CLASS 1 LASER PRODUCT



Refer to Bulletin No. (2263) for more details.







Optional Accessories

- Laser hologage stand: **No.971750**
- Stem fixture for fixing to top surface: **No.971751**
- Stem fixture for fixing to bottom surface: **No.971752**
- Spindle lifting cable: **No.971753**
- Rubber boot: **No.238772** (spare)

DIMENSIONS

Unit: mm

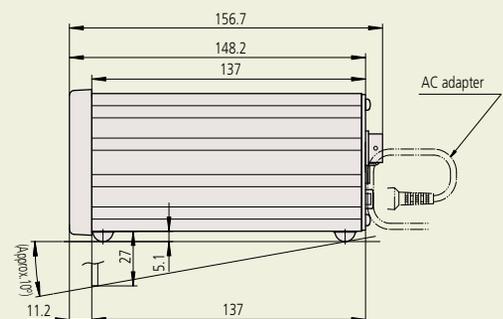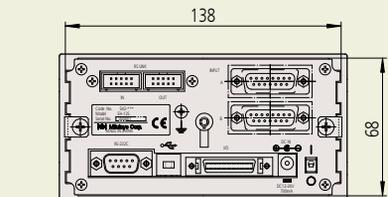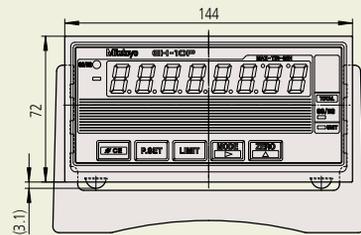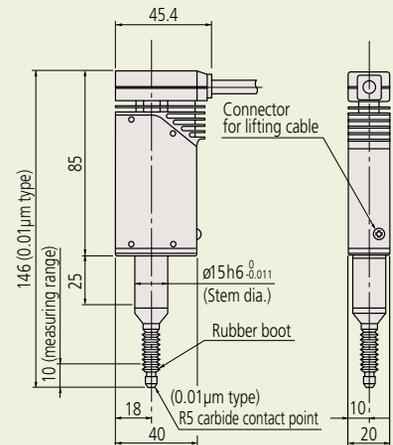

EH Counter – Multi-function Type

Series 542 — Versatile, Multi-function Displays for all Linear Gage Formats

Optional Accessories

- I/O output connector (with cover): **No.02ADB440**


- Two types are available for this model: a 1-axis display and a 2-axis display, which enables addition or subtraction calculations between two gages.
- Multifunctional counter equipped with zero-setting, presetting and tolerance judgment.
- RS-232C and USB are equipped as standard. Data transfer to a PC is possible. (*USB is supported only by Mitutoyo SENSORPAK.)
- A multi-point (max. 12 points) measuring system can easily be configured with the built-in RS link networking function. Refer to "Quick Guide to Precision Measuring Instruments" on page G-32 for details of the RS link.
- Employs DIN size (144x72mm) and mount-on-panel configuration to facilitate system integration.
- Peak mode feature: Max, Min, and TIR (can be toggled)



SPECIFICATIONS

Order No.	542-075A	542-071A	542-073A	542-074A	542-072A
Applicable gage head	LGE, LGF, LGK, LGB, LGM, LG, LGH (not compatible with LGH-110, reference point, or sine wave models)		LGF with reference point mark	LGB sine wave output / Linear scale sine wave output	LGD, LGS, ID, SD
Number of gage inputs	1		2		
Number of axes to be displayed	1 axis		2 axes		
Quantizing error	±1 count				
Maximum input frequency	2.5MHz (2-phase square wave)			1MHz (2-phase sine wave)	—
Resolution	0.01mm (±9999.99mm) / .0005" (±9.9995") 0.001mm (±999.999mm) / .00005" (±9.99995") 0.0001mm (±99.9999mm) / .000005" (±.999995") [Parameter set]				Automatic setting by gage
Display	Sign plus 8 digits (Green LED)				
Tolerance judgment display	LED display (3 steps: Amber, Green, Red/ 5 steps: Amber, Amber flashing, Green, Red flashing, Red)				
Interface	RS-232C/USB/parameter selection via digimatic (only DP-1VR, digimatic mini-processor can be connected) (USB used only with SENSORPAK.) Selection by parameter from 3-step, 5-step, or digit BCD Total tolerance judgment output (when tolerance function is enabled) Analog output (1V-4V)				
Input/output	Control output	Normal operation signal (NOM): open collector			
	Control input	Display BANK switching, peak mode, presetting, display hold, hold per axis: open-collector or no-voltage contact signal (with/without contact point)			
Rating	Power supply voltage	Supplied AC adapter, or 12 - 24V DC			
	Power consumption	8.4W (max. 700mA) Ensure at least 1A is available per unit.			
Operating temperature (humidity) range	0 to 40°C (RH 20 to 80%, no condensation)				
Storage temperature (humidity) range	-10 to 50°C (RH 20 to 80%, no condensation)				
External dimensions	144 (W) x 72 (H) x 156.7 (D) mm				
AC adapter / AC cable (standard accessory)	AC adapter: No. 357651 / AC cable (USA): No.02ZAA010* ,				
Applicable input	Differential square-wave			Differential sine-wave	Digimatic code output
Mass	Approx. 760g	Approx. 800g	Approx. 800g	Approx. 900g	Approx. 800g

DIMENSIONS

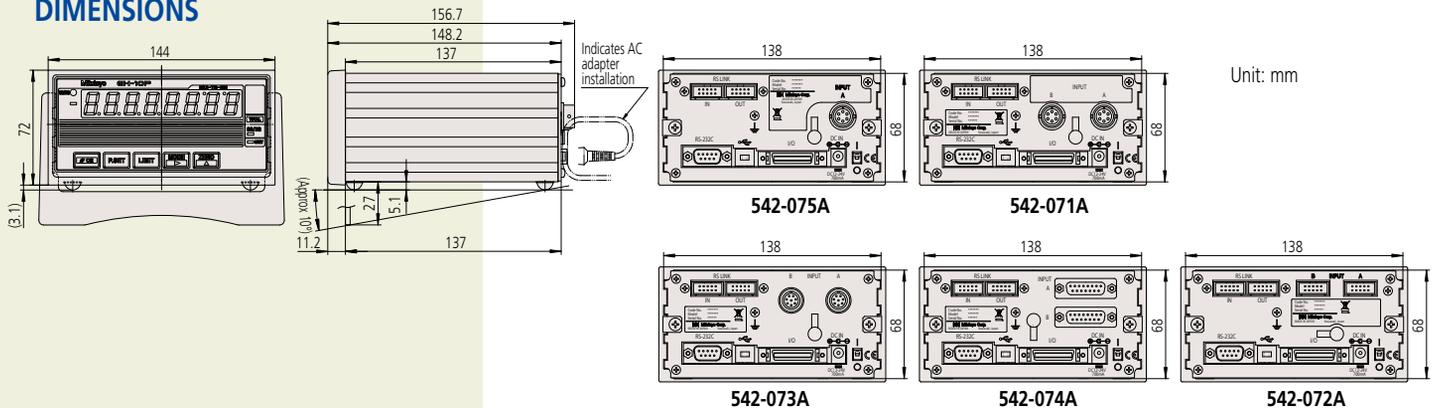

EC Counter – Single-function Type

Series 542 — Simple Display for LGD, LGS, or other Digimatic Gages, Go/NG Judgment and Output

- Produces 3-step/5-step, 3 types of tolerance output and BCD output.
- Employs DIN size (96x48mm) and mount-on-panel configuration to facilitate system integration.



542-007A



Function

- Preset
- Tolerance judgment (3/5-step, 3 types)
- Zero

Optional Accessories




- Connecting cable for digimatic mini-processor: **No.936937** (1m), **No.965014** (2m)
- DC plug PJ-2: **No.214938**
- I/O cable (2m): **No.C162-155**

SPECIFICATIONS

Order No.	542-007A	
Applicable head/input	LGD, LGS, ID, SD, Digimatic code (SPC)	
Number of gage inputs	1	
Resolution	0.01mm (± 9999.99) / 0.0005" (± 99.9995) / 0.001" (± 999.999) 0.001mm (± 9999.999) / 0.00005" (± 9.99995) / 0.0001" (± 99.999) [automatic setting by gage]	
Display	Sign plus 6 digits (Green LED)	
Tolerance judgment display	LED display (3 steps: Amber, Green, Red)	
External output (switching type)	Tolerance judgment output	Go/No-Go (open-collector)
	Data output	Digimatic output
Control input	External PRESET, external HOLD	
Rating	Power supply voltage	Supplied AC adapter, or 9 - 12V DC
	Power consumption	4.8W (max. 400mA) Ensure at least 1A is available per unit.
Operation/storage temperature range	Operation: 0 - 40°C / Storage: -10 to 50°C	
External dimensions	96 (W) x 48 (H) x 84.6 (D) mm	
Standard accessories	AC adapter: No.06AEG302JA	
Mass	220g	

DIMENSIONS

Unit: mm

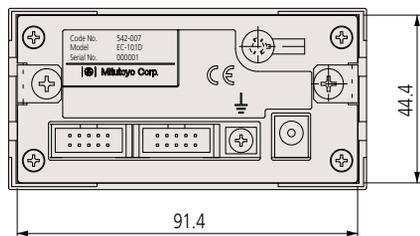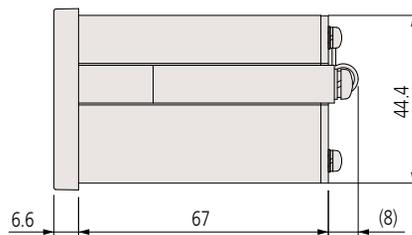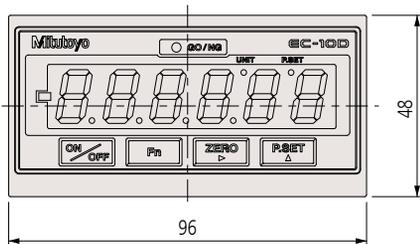

EG Counter – Single-function Type

Series 542 — Simple Display, Multi-Step Go/No Go Judgment and Output, BCD Output, Open Collector

Function

- Preset
- Direction switch
- Tolerance judgment (3/5-step, 3 kinds)
- Peak (max., min., runout) measurement
- Constant number
- Smoothing
- Error display/output
- Key protection

Optional Accessories

- I/O output connector (with cover): **No. 357651**
- AC adapter: **No.357651 ***
- AC cable (USA): **02ZAA010***
- Terminal connecting cable: **No.02ADD930***
- * Included in package Order No.

- Produces 3-step/5-step, 7 types of tolerance output and limit value output independently for each of 7 channels.
- Comes with serial BCD output capability, for connection to a programmable controller or personal computer, etc.
- Employs DIN size (96x48mm) and mount-on-panel configuration to facilitate system integration.



542-015



542-017




542-016

SPECIFICATIONS

Order No. (counter only)	542-015	542-017	542-016
Package No. (counter w/AC adapter)	64PKA131A	64PKA133A	64PKA132A
Applicable gage head	LGE, LGF, LGK, LGB, LGM, LG, LGH (Not compatible with LGH110, reference point or sine wave models)	LGF with reference point mark (LGF-Z)	LGD, LGS, ID, SD
Number of gage inputs	1		
Quantizing error	±1 count		
Maximum input frequency	1.25MHz, response speed depends on gage specification.		
Resolution	0.01mm (±9999.99mm) / .0005" (±99.9995") / .001" (±999.999") 0.005mm (±9999.995mm) / .00005" (±9.99995") / .0001" (±99.999") 0.001mm (±999.999mm) / .00005" (±9.99995") / .0001" (±99.999") 0.0005mm (±99.9995mm) / .000005" (±.999995") / .00001" (±9.99999") 0.0001mm (±99.9999mm) / .000005" (±.999995") / .00001" (±9.99999")*		0.01mm (±9999.99mm) / .0005" (±99.9995") / .001" (±999.999") (±99.9995") / .001" (±999.999") 0.001mm (±999.999mm) / .00005" (±9.99995") / .0001" (±99.999") .00005" (±9.99995") / .0001" (±99.999") [Automatic setting by gage]
Display	Sign plus 6 digits (Green LED)		
Tolerance judgment display	LED display (3 steps: Amber, Green, Red / 5 steps: Amber, Amber flashing, Green, Red flashing, Red)		
Tolerance judgment output	L1 to L5 (Open-collector / Switchover between L1 to L5 and BCD output with parameter)		
Control output	Normal operation signal (NOM): open-collector		
BCD output	Open-collector / Switchover between 6-digit (positive/negative-true logic) and tolerance judgment output with parameter		
Control input	Presetting, display hold, peak value clear, tolerance judgment BANK switch		
Rating	Power supply voltage	12 - 24V DC	
	Power consumption	6W or less (500mA max.) Ensure at least 1A is available per unit.	
Operating temperature range	0 to 40°C (RH 20 to 80%, no condensation)		
Storage temperature range	-10 to 50°C (RH 20 to 80%, no condensation)		
External dimensions	96 (W) x 48 (H) x 156 (D) mm		
Applicable input	Differential square-wave	Differential square-wave with origin point mark	Digimatic code (SPC)
Number of gage inputs	1		
Mass	Approx. 400g		

* range is limited when using 0.0001 mm gages

DIMENSIONS

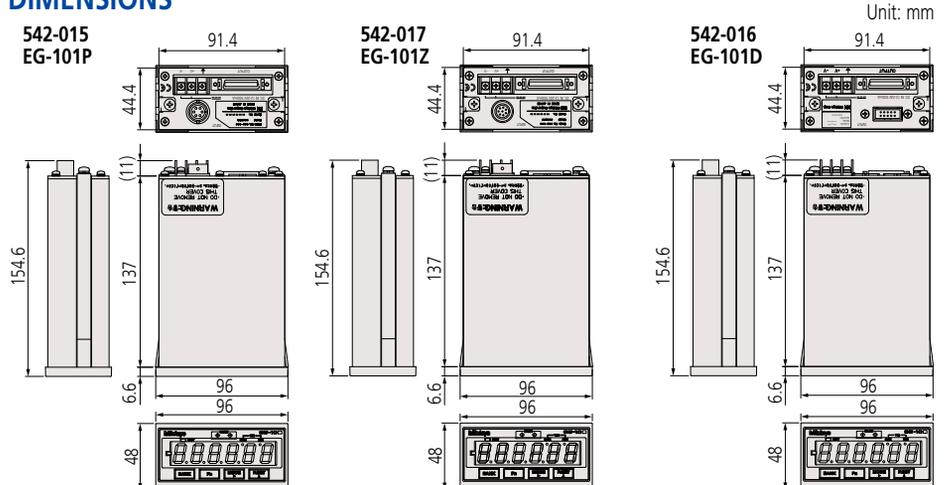

EB Counter – Single-function Type

Series 542 — Simple Display, Multi-Step Go/No-Go Judgment, BCD Output and Analog Output

- Produces 3-step/5-step, 7 types of tolerance output and limit value output independently for each of 7 channels.
- Comes with serial BCD output capability, for connection to a programmable controller or personal computer, etc.
- Dynamic measurement possible with simplified analog output.
- Employs DIN size (96×48mm) and mount-on-panel configuration to facilitate system integration.



542-092-2



542-094-2



542-093-2

SPECIFICATIONS

Order No. (counter only)	542-092-2	542-094-2	542-093-2
Package No. (counter w/AC Adapter)	64PKA134A	64PKA136A	64PKA135A
Applicable gage head	LGF, LGK, LGE, LGB (not compatible with reference point or sine wave output type models)	LGF with reference point mark (LGF-Z)	LGS, LGD, LGD-M
Number of gage inputs	1		
Quantizing error	±1 count		
Maximum input frequency	1.25MHz (2-phase square wave), response speed depends on gage specification.		Response speed depends on gage specification.
Resolution	0.01mm (±9999.99mm) / .0005" (±99.9995") 0.005mm (±9999.995mm) / .00005" (±9.99995") 0.001mm (±999.999mm) / .00005" (±9.99995") 0.0005mm (±99.9995mm) / .000005" (±.999995") 0.0001mm (±99.9999mm) / .000005" (±.999995")*		0.01mm (±9999.99mm) / .0005" (±99.9995") 0.005mm (±9999.995mm) / .00005" (±9.99995") 0.001mm (±999.999mm) / .00005" (±9.99995") 0.0005mm (±99.9995mm) / .000005" (±.999995") 0.0001mm (±99.9999 mm) / .000005" (±.999995")
Display	Sign plus 6 digits (Green LED)		
Tolerance judgment display	LED display (3 steps: Amber, Green, Red / 5 steps: Amber, Amber flashing, Green, Red flashing, Red)		
Input/output	Tolerance judgment output	L1 to L5, open-collector	
	Control output	Normal operation signal (NOM), open-collector	
	Control input	Presetting, display hold, peak value clear, tolerance judgment BANK switch, open-collector or no-voltage contact signal (with/without contact point)	
Interface	Serial BCD	Bit serial format, open-collector	
	Analog output	2.5V+Counting value Voltage resolution (25mV/2.5mV): Full-scale 0 to 5V	
	Digimatic input/output	<ul style="list-style-type: none"> • Connecting to the external switch box (No.02ADF180) makes it easy to enter tolerance limits and preset values. Note: This function is not available when the gage is connected to DP-1VR, Digimatic Mini-Processor. • Can be connected to Digimatic peripherals that have Data (poll) button • Number of tolerance steps can be expanded by assembling EB-D counters. 	
Rating	Power supply voltage	12 - 24V DC	
	Power consumption	6W or less (50mA max.) Ensure at least 1A is available per unit.	
Operating temperature range	0 to 40°C (RH 20 to 80%, no condensation) / -10 to 50°C (RH 20 to 80%, no condensation)		
External dimensions	96(W)×48(H)×156(D)mm		
Applicable input	Differential square-wave	Differential square-wave with origin point mark	Digimatic code (SPC)
Mass	Approx. 400g	Approx. 400g	Approx. 400g

* range is limited when using 0.0001 mm gages

Function


- Preset
- Tolerance judgment output (3/5-step, 7 types)
- Limit value output (2 types independently for each of the 7 channels)
- Peak (max., min., runout) measurement
- Diverse data output (Serial BCD, Simplified analog, Digimatic)

Optional Accessories

- I/O output connector (with cover): No.02ADB440
- AC adapter: No.357651 *
- AC cable (USA): 02ZAA010*
- Terminal connecting cable: No.02ADD930*
- * Included in package Order No. The tolerance values or preset values can be easily input. No.02ADF180 (with 2m cable)



DIMENSIONS

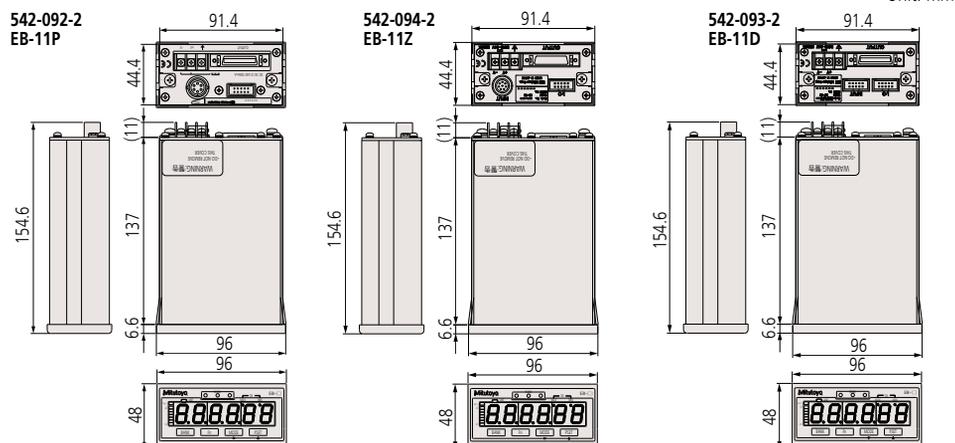

EV Counter – Multi-function, Multiple Input Type

Series 542 — Processor (Optional Display), Multi-function/output


- Up to six gages can be connected to one unit, extendable up to 10 units (60 gages at maximum) using the RS Link function* to facilitate the configuration of a multi-point measurement system.

* Refer to "Quick Guide to Precision Measuring Instruments" on page G-32 for details of the RS link.

- A range of output modes to choose from: I/O output for tolerance judgment and segment output, BCD data output and RS-232C output are available.
- Other than normal measurement, peak measurement or differential measurement between gages are available.



542-063



542-067



542-064

Function

- External Control (Zero-set, Preset etc.)
- Direction switch
- Error display
- Tolerance judgment output
- Diverse data output (RS-232C, BCD, Segment)
- Peak measurement

Maximum value, minimum value, runout, and differential measurement between two gages
Addition, averaging, maximum value, minimum value, and maximum width

Optional Accessories

- D-EV External display unit: **No.02ADD400**
 - SPC cable (0.5m): **No.02ADD950**
 - SPC cable (1m): **No.936937**
 - SPC cable (2m): **No.965014**
 - AC adapter: **No.357651** *
 - AC cable (USA): **02ZAA010** *
 - Terminal connecting cable: **No.02ADD930** *
- * Included in package Order No.

SPECIFICATIONS

Order No.	542-063	542-067	542-064
Pkg No.(counter w/AC adapter)	64PKA137A	64PKA139A	64PKA138A
Applicable gage head	LGE, LGF, LGK, LGB, LGM, LG not compatible with reference point mark, sine wave output type or 0.1μm resolution models.	LGF with reference point mark (LGF-Z)	LGD, LGS
Number of input channels	6		
Maximum input frequency	1.25MHz (2-phase square wave), response speed depends on gage specification. Max. counting speed: 5MHz	1.25MHz (2-phase square wave), response speed depends on gage specification. Max. counting speed: 5MHz	Response speed depends on gage specification.
Quantizing error	±1 count		
Resolution	10μm (±999999.99mm) / .0005" (±9999.9995") 5μm (±999999.995mm) / .00005" (±999.99995") 0.5μm (±9999.9995mm) / .000005" (±.99.999995")*1 [Parameter set]	10μm (±999999.99mm) / .0005" (±9999.9995") 5μm (±999999.995mm) / .00005" (±999.99995") 1μm (±99999.999mm) / .00005" (±999.99995") 0.5μm (±9999.9995mm) / .000005" (±.99.999995") [Parameter set]	Depends on gage specification.
LED display	8 digits for parameter display (displays settings), 1 for error display		
Error message	Overspeed, gage error etc.		
External display	Dedicated external display unit D-EV (optional) can be connected.		
Number of input switches	4		
Function of input switches	Measurement mode switching, parameter setting		
Input/output	Tolerance judgment output	1 to 6 channels (L1, L2, L3), open-collector	
	BCD output	Parallel BCD output (positive/negative-true logic), open-collector	
	Segment output	Function to set on only the terminals corresponding to the counting values, open-collector	
	Control output	Normal operation signal (NOM), open-collector	
Interface	Control input	Output channel designation (segment, in the BCD mode), presetting, peak value clear, range changeover (at segment output), holding counting value open-collector or no-voltage contact signal (with/without contact point)	
	RS-232C	Measurement data output and control input EIA RS-232C-compatible Use cross cables for home position, DTE (terminal definition).	
Rating	RS link	Max. connecting unit: 10 (6 when using EF counter) Connecting cable length: Max. 10m (sum of link cable length) Data transfer time: 1sec./60ch (when transmission rate is 19200bps)	
	Power supply voltage	12 - 24V DC, terminal block (M3 screw)	
	Power consumption	8.4W or less (700mA max.) Ensure at least 1A is available per unit.	
Operating temperature (humidity) range	0 to 40°C (RH 20 to 80%, no condensation)		
Storage temperature (humidity) range	-10 to 50°C (RH 20 to 80%, no condensation)		
External dimensions	144 (W) × 72 (H) × 139 (D) mm		
Mass	Approx. 910g	Approx. 910g	Approx. 830g
Standard accessories	Fixing foot (4), connecting bracket (4), fixing screw M4x12 (8)		
Applicable input	Differential square-wave		Digimatic code (SPC)

*1: Available when using D-EV.


*2: D-EV is required when selecting 0.1μm resolution.

EV Counter System Configuration

Series 542 — Processor (Optional Display), Multi-function/output




System Configuration

A counter system performs output and display for connected Mitutoyo linear gages.

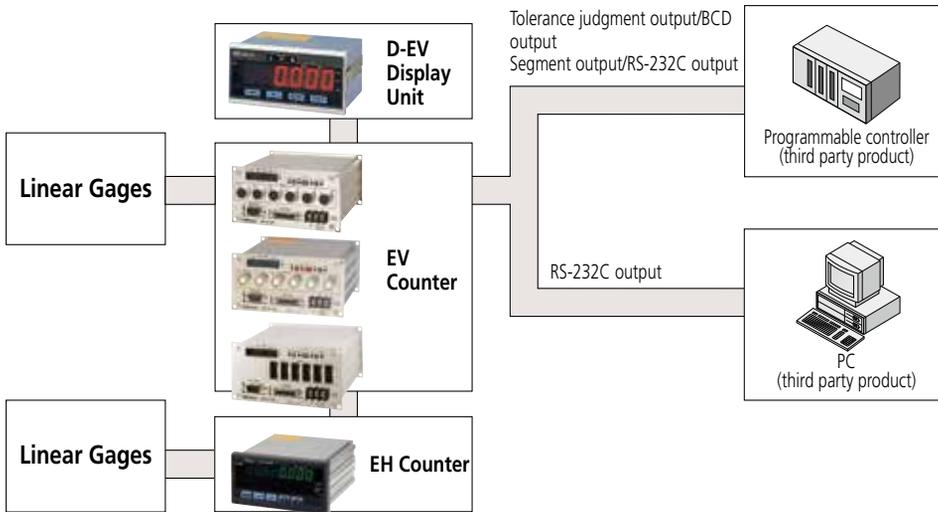

DIMENSIONS

Unit: mm

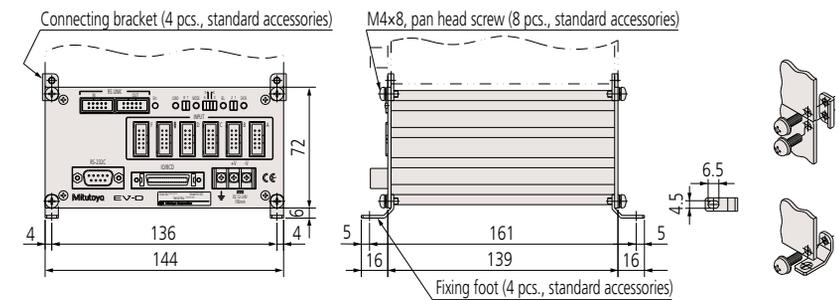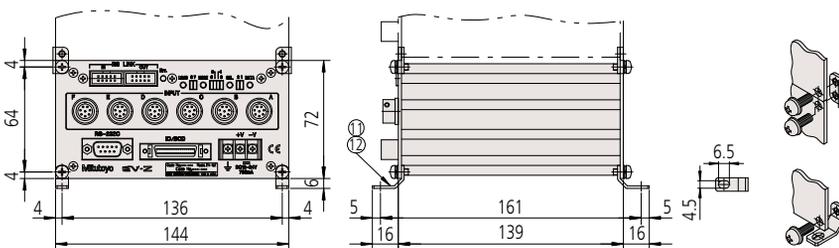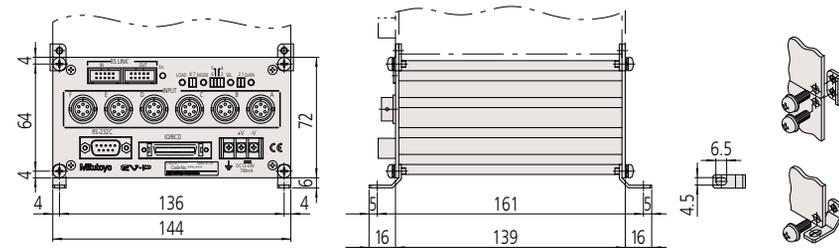

D-EV Display Unit for EV Counter

Function

- External Control (Zero-set, Preset etc.)
 - Direction switch
 - Error display
 - Tolerance judgment output
 - Data output (RS-232C, BCD, Segment)
 - Peak measurement
- Maximum value, minimum value, runout, and differential measurement between two gages
 Addition, averaging, maximum value, minimum value, and maximum width

Optional Accessories

- SPC cable (0.5m): **No.02ADD950***1
 - SPC cable (1m): **No.936937***1
 - SPC cable (2m): **No.965014***1
 - AC adapter: **No.357651**
 - AC cable (USA): **02ZAA010***2
 - Terminal connecting cable: **02ADD930***2
- *1: Required when connecting with **EV-16P/D/Z**.
 *2: Required when using AC adapter.

Note: AC adapters may not be needed if using power from EV counter to power the D-EV.

- Display unit for the EV counter.
- Allows set up of EV counter without a personal computer or other equipment.
- Able to display each gage measurement value and go/no-go judgment result, total go/no-go judgment result for all gages, setting details and errors.





02ADD400

SPECIFICATIONS

Order No.	02ADD400
Number of connections	1 EV counter per unit
Number of digits	Sign plus 6 digits (8 digits internal to EV counter)
LED	Channel display (also for judgment result display): 3 (3-color LED) Measurement mode display (current data, maximum value, minimum value, runout): 2 Status display: 1 (2 colors)
Operation switches	4
Function of operation switch	Channel switching, measurement mode switching (current data, maximum value, minimum value, runout), parameter setting, presetting, tolerance setting
Input/output	RS Link connectors: 1 each for IN, OUT
Error message	Overspeed, gage error etc.
Power supply	Terminal block (M3 screw), 12 - 24V DC, 200mA
Operating temperature (humidity) range	0 to 40°C (RH 20 to 80%, no condensation)
Storage temperature(humidity) range	-10 to 50°C (RH 20 to 80%, no condensation)
External dimensions	96(W)×48(H)×84.6(D)mm

DIMENSIONS

Unit: mm

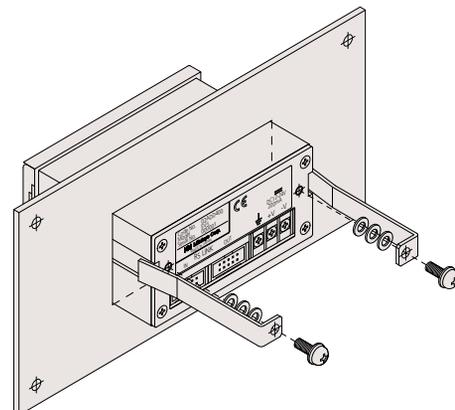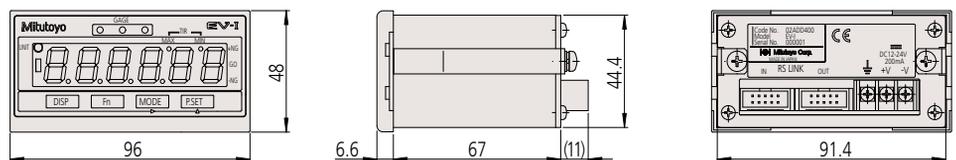

Sensorpak Software

Dynamically Displays Positions, Tolerances and Calculations, and Acquires Basic Data from EH, EV Counters and Litematics

- This software facilitates loading measurement data onto a personal computer from a linear gage counter with RS-232C output (EH, EV), with USB output (EH), or from a Litematic display (VL).
- 60 channels (max.) of measurement data can be processed.
- Arithmetical calculations and maximum width calculations can be performed using the measurement data.
- Exporting measurement data into MS-Excel format is supported.
- Real-time graphical display by means of bar-graph or meter is provided.
- Any gage that can be connected to an EH or EV counter can be used in Sensorpak.

MiCAT

Mitutoyo Intelligent Computer Aided Technology

the standard in world metrology software

SENSOR



Meter screen

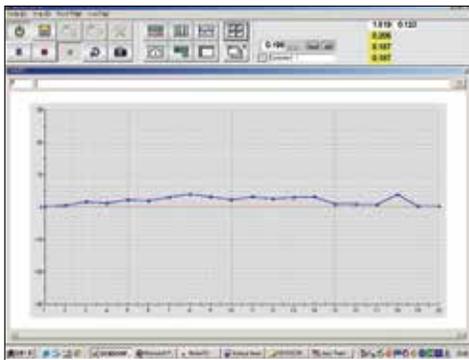


Chart screen



Measurement screen

SPECIFICATIONS


Order No.	02NGB073 (Software v 3.0 plus I/O cable)
Display function	Display type: Counter, bar graph, meter, chart (capable of simultaneous display) Tolerance judgment result: Color display (green/red) Connectable gages: max. 60 gages
Calculation functions	Calculation items: Sum, difference, total, average, maximum, minimum, range (maximum–minimum), calculation with a constant Connectable gages: Max. 30 calculation functions (between two gages)
Total tolerance judgment	Go/No-go judgment (by specifying gages to be used for total tolerance judgment) Go/No-go signal output with optional I/O cable
Input function	Trigger function: by means of key, timer or external TRG (with optional I/O cable) Data input frequency: Max. 9999 times (with 60 gages connected) to 60000 times (with 6 gages connected)
Output function	Direct output to EXCEL spreadsheet, CSV file output (compatible with MeasurLink)
Connectable items	EF, EH, EV, Litematic (RS Link ready products)
System requirements	CPU: DOS/V PC (w/ RS-232C) 2GHz or more OS: Windows 7(32/64 bit), Windows 8.1(32/64 bit), windows 10(64bit) Memory: 2GB or more USB Com: USB 2.0 Display: 1024 x 786 or more Excel: 2007, 2010, 2013

Currently supported languages: English, German, French, Spanish
User's manual: English

Optional Accessory

- 21HZA137:** Connecting Cable
- Counter connection (9pin D-SUB)
 - PC connection (9-pin D-SUB)
 - PLC connection (5-pin DIN)

Optional Stand for VL-50S-B

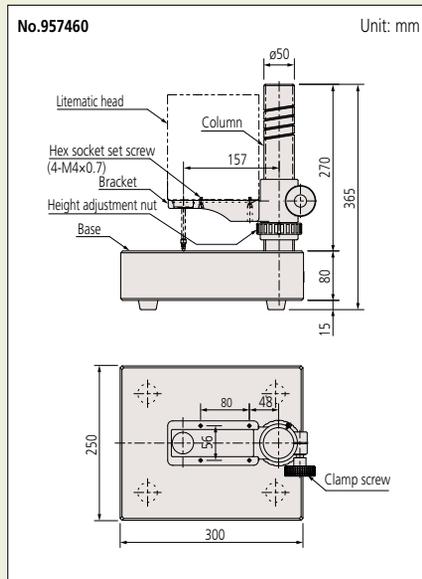

Optional Accessories

- Foot switch: **No.937179T**
- Dedicated stand: **No.957460***4
- SPC cable (1m): **No.936937***5
- SPC cable (2m): **No.965014***5
- Weight set: **No.02AZE375***6
- Recommended contact point:

Shell type

- Carbide-tipped spherical contact point, $\phi 7.5$
- Carbide-tipped spherical contact point, $\phi 10.5$
- Carbide-tipped needle contact point, $\phi 0.45$

*4: Only available for **VL-50S** models

*5: Refer to page G-32 for details of the RS link.

*6: Not applicable to **VL-50-100-B**, **VL-50S-100-B**.


Measurement Examples



Glass dimensional measurement



Thin sheet metal thickness

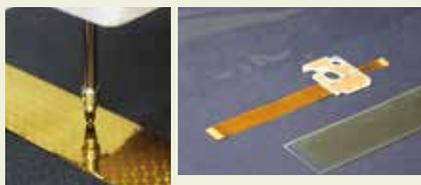

Thickness measurement of non-metallic sheet

Laser Beam Safety Precautions

This system uses a low-power invisible laser beam (780nm) which corresponds to a CLASS 1 (invisible radiation) of IEC60825-1 for measurement. The CLASS 1 laser warning label as shown below is attached to the main unit.

CLASS 1 LASER PRODUCT

Litematic – Low-Force Measurement

Series 318 — Low Force, High-resolution, Motorized Measurement of Easily-deformed Parts

- The Litematic is designed for measuring easily deformed workpieces and high-precision parts, with extra-low measuring force of 0.01N.
- 0.15N and 1N types are capable of measuring at a certain measuring force by using a Litematic feature, while the 0.01N type is suitable for measuring delicate workpieces.
- *0.15N, 1N types are factory-installed option.
- The motor-driven spindle moves up/down and stops when the contact point touches the workpiece. Then the maximum, minimum values and runout value are measured under a constant force.
- High resolution of 0.01 μ m, and wide measuring range of 50mm.
- Measuring system VL-50-B, integrated display type, and VL-50S-B, a separate display type, are available.
- The measuring table supplied with VL-50-B is ceramic and corrosion-free for easier maintenance and storage.
- The spindle is made of low thermal-expansion material.



318-221A



318-226A

SPECIFICATIONS


Order No.	318-221A	318-222A	318-223A	318-226A	318-227A	318-228A
Model	VL-50-B	VL-50-15-B	VL-50-100-B	VL-50S-B	VL-50S-15-B	VL-50S-100-B
Measuring range	0 to 50mm (0-2")					
Resolution	0.01/0.1/1.0 μ m (.000005"/.000005"/.00005")					
Display unit	8 digits/14mm (.6") character height (without signs)					
Detection method	Reflection-type linear encoder					
Stroke	51.5mm (.2") (when using a standard contact point)					
Indication accuracy (20°C)*1	(0.5+L/100) μ m L=arbitrary measuring length (mm)					
Accuracy guaranteed temperature*2	20 \pm 1°C					
Repeatability*1	σ =0.05 μ m					
Measuring force*1	0.01	0.15N*3	1N*3	0.01N	0.15N*3	1N*3
Feed speed	Approx. 2mm/s (.08"/s) or 4mm/s (.16"/s) (changeable by parameter)					
Fast feed	Approx. 8mm/s (.3"/s)					
Standard contact point	ϕ 3mm carbide tipped (fixing screw: M2.5 (P=0.45) \times 5) No.901312					
Measuring table	ϕ 100 (ceramic, grooved, removable)					
Input	Foot switch input (when optional foot switch is used) External control					
Output	Digimatic output/RS-232C output (changeable by parameter)					
Rating Power supply	85 - 264V AC (depends on AC adapter)					
Power consumption	Max. 12 W (12V, 1A)					
Standard accessories	AC adapter: No.357651 , Power cable/grounding wire: No.02ZAA000 , AC cable (USA): No.02ZAA010 * Hex wrench (2 pcs, for fixing contact point and for removing fixing bracket)					

*1: Normal measurement using standard contact point.


*2: Or less temperature change. Hot or cold direct air flow should be avoided.

*3: 0.15N, 1N types are factory-installed option.

DIMENSIONS

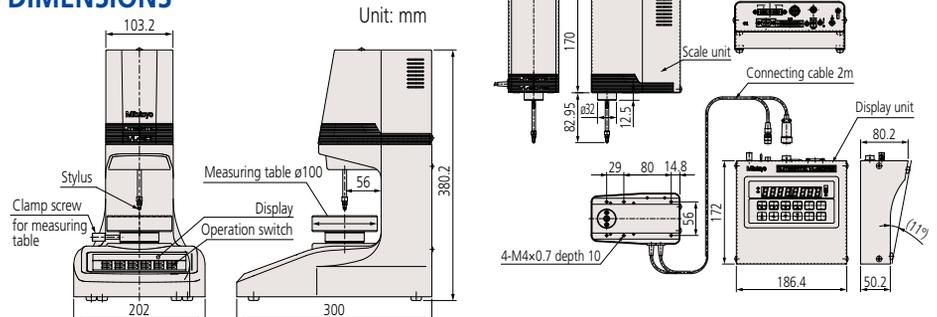

Quick Guide to Precision Measuring Instruments




Linear Gages

Head

Plain Stem and Stem with Clamp Nut

The stem used to mount a linear gage head is classified as a plain type or clamp nut type as illustrated below. The clamp nut stem allows fast and secure clamping of the linear gage head. The plain stem has the advantage of wider application and slight positional adjustment in the axial direction on final installation, although it does require a split-fixture clamping arrangement or adhesive fixing. However, take care so as not to exert excessive force on the stem.

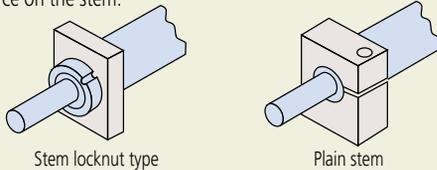

Measuring Force

This is the force exerted on a workpiece during measurement by the contact point of a linear gage head, at its stroke end, expressed in newtons.

Comparative Measurement

A measurement method where a workpiece dimension is found by measuring the difference in size between the workpiece and a master gage representing the nominal workpiece dimension.

Ingress Protection Code

IP54 protection code

Type	Level	Description
Protects the human body and protects against foreign objects	5: Dust protected	Protection against harmful dust
Protects against exposure to water	4: Splash-proof type	Water splashing against the enclosure from any direction shall have no harmful effect.

IP66 protection code


Type	Level	Description
Protection against contact with the human body and foreign objects	6: Dust tight	Protection from dust ingress Complete protection against contact
Protects against exposure to water	6: Water-resistant type	Water jets directed against the enclosure from any direction shall have no harmful effect.

Precautions in Mounting a Gage Head

- Insert the stem of the gage into the mounting clamp of a measuring unit or a stand and tighten the clamp screw.
- Notice that excessively tightening the stem can cause problems with spindle operation.
- Never use a mounting method in which the stem is clamped by direct contact with a screw.
- Never mount a linear gage by any part other than the stem.
- Mount the gage head so that it is in line with the intended direction of measurement. Mounting the head at an angle to this direction will cause an error in measurement.
- Exercise care so as not to exert a force on the gage through the cable.

Precautions in Mounting a Laser Hologage

To fix the Laser Hologage, insert the stem into the dedicated stand or fixture.

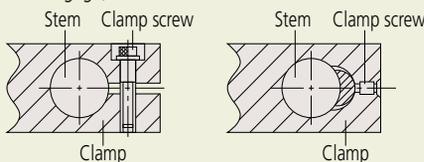


Recommended hole diameter on the fixing side: 15mm +0.034/-0.014

- Machine the clamping hole so that its axis is parallel with the measuring direction. Mounting the gage at an angle will cause a measuring error.
- When fixing the Laser Hologage, do not clamp the stem too tightly. Over-tightening the stem may impair the sliding ability of the spindle.
- If measurement is performed while moving the Laser Hologage, mount it so that the cable will not be strained and no undue force will be exerted on the gage head.

Display Unit


Zero-setting

A display value can be set to 0 (zero) at any position of the spindle.

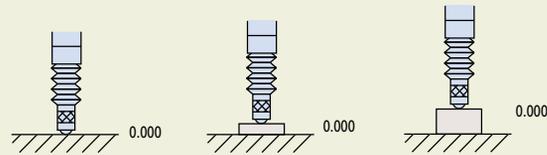


Presetting

Any numeric value can be set on the display unit for starting the count from this value.

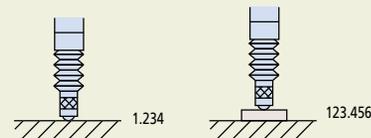


Direction Changeover

The measuring direction of the gage spindle can be set to either plus (+) or minus (-) of count.



MAX, MIN, TIR Settings

The display unit can hold the maximum (MAX) and minimum (MIN) values, and MAX - MIN value during measurement.

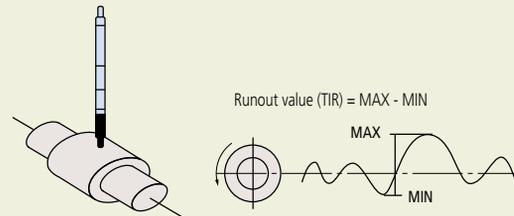

Tolerance Setting

Tolerance limits can be set in various display units for automatically indicating if a measurement falls within those limits.

Open Collector Output

An external load, such as a relay or a logic circuit, can be driven from the collector output of an internal transistor which is itself controlled by a tolerance judgement result, etc.

Relay output

Contact signal that outputs the open/closed status.

Digimatic Code

A communication protocol for connecting the output of measuring tools with various Mitutoyo data processing units. This allows output connection to a Digimatic Mini Processor DP-1VR for performing various statistical calculations and creating histograms, etc.

BCD Output

A system for outputting data in binary-coded decimal notation.


RS-232C Output

A serial communication interface in which data can be transmitted bi-directionally under the EIA Standards. For the transmission procedure, refer to the specifications of each measuring instrument.

RS Link Function Multi-point measurement can be performed by connecting multiple EH or EV counters with RS Link cables.

■ RS Link for EH Counter


It is possible to connect a maximum of 10 counter units and handle up to 20 channels of multi-point measurement at a time. For this connection use a dedicated RS Link cable **No.02ADD950** (0.5m), **No.936937** (1m) or **No.965014** (2m). (The total length of RS Link cables permitted for the entire system is up to 10m.)

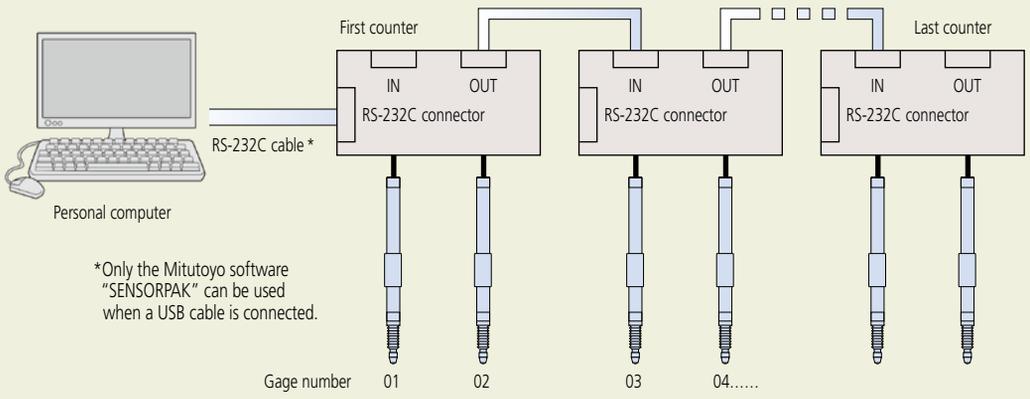

■ RS Link for EV Counter

It is possible to connect a maximum of 10* counter units and handle up to 60 channels of multi-point measurement at a time. For this connection use a dedicated RS Link cable **No.02ADD950** (0.5m), **No.936937** (1m) or **No.965014** (2m). (The total length of RS Link cables permitted for the entire system is up to 10m.)

* The maximum number of counter units that can be connected is limited to 6 (six) if an EH counter is included in the chain.

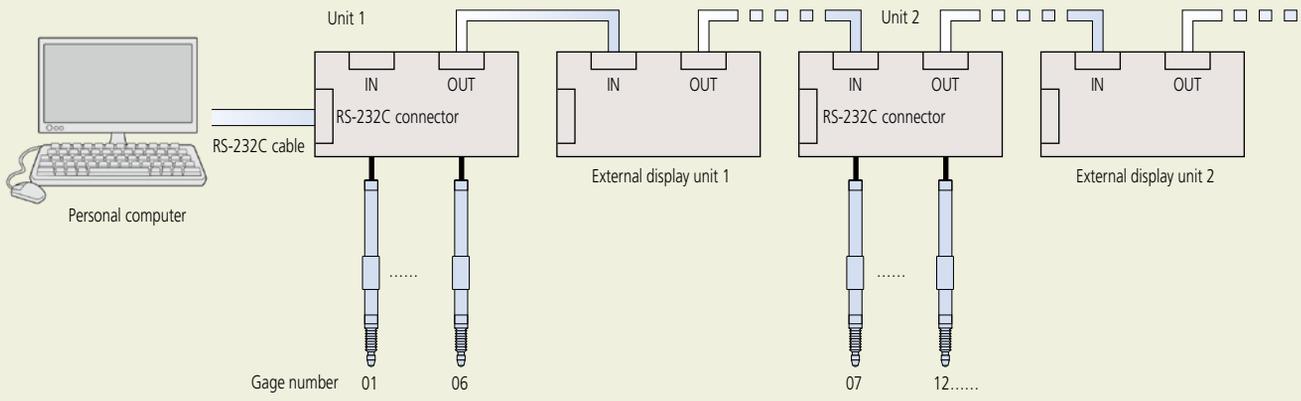


Lever-head mounting brackets (optional)

Optional accessories for Mitutoyo test indicators can be used.

Stems



Clamp



Holder



SERIES 519 Mu-checker Probes (Cartridge head)


SPECIFICATIONS

Cartridge heads


Order No.	519-331	519-332	519-346	519-347	519-385	519-341	519-348
Measuring range (mm)	±0.5	±0.5	±0.25	±0.5	±1.5	±2.5	±1.0
Stroke (mm)	±0.65	±0.65	+0.34 -0.26	+0.85 -0.65	+2.35 -1.65	+3.2 -2.8	+1.35 -1.15
Measuring force (N)	Approx. 0.25	Approx. 0.25	Approx. 0.7	Approx. 0.7	Approx. 0.7	Approx. 0.9	Approx. 0.7
Stem Dia. (mm)	ø8	ø3/8"	ø8	ø8	ø8	ø8	ø8
Linearity (%)	±0.5	±0.5	±0.3	±0.3	±0.3	±0.5	±0.3
Plunger support	Plain bearing			Linear ball-bearing			

519-331/(519-332)


- M2.5x5 (4-48 UNF) interchangeable contact points for dial indicators can be used.



519-346




519-347




519-385

- M2.5x5 interchangeable contact points for dial indicators can be used.

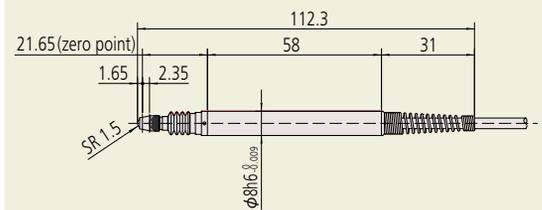


519-341

- M2.5x5 interchangeable contact points for dial indicators can be used.

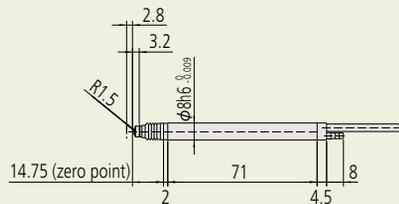

519-348

- M2.5x5 interchangeable contact points for dial indicators can be used.

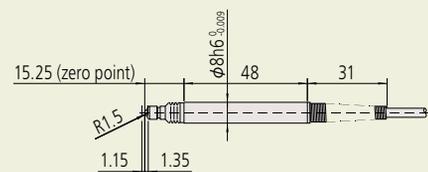

Mu-checker

SERIES 519 Mu-checker (Analog/Digital electronic micrometer)

- Single touch zero-set function is standard.
- Switchable measurement ranges make the Mu-checker suitable for a range of applications.

Analog Mu-checker



Standard type
519-552A



Differential type
519-554A

SPECIFICATIONS

Order No.	519-552A	519-554A
Type	Standard type (one probe required)	Differential type (one/two probes required)
Display range	$\pm 5\mu\text{m}/\pm 15\mu\text{m}/\pm 50\mu\text{m}/\pm 150\mu\text{m}/\pm 500\mu\text{m}/\pm 1500\mu\text{m}$ $\pm .00015"/\pm .0005"/\pm .0015"/\pm .005"/\pm .015"/\pm .05"$	
Resolution	0.1 μm /0.5 μm /1 μm /5 μm /10 μm /50 μm .000005"/.00001"/.00005"/.0001"/.0005"/.001"	
Differential mode	$\pm A$	$\pm A, \pm B, \pm A \pm B$
Display accuracy (linearity)	$\pm 1\%$ / \pm full scale	
Analog output	$\pm 1\text{V}$ \pm full scale	
Analog output accuracy	$\pm 0.1\%$ Within \pm full scale (excluding probe)	
Zero-setting adjustment range	Manual Instant zero setting: 1/3 of full scale for each range	
External dimensions	134(W) x 183(D) x 208(H) mm	
Mass	2.4kg	
Power input	AC adapter 100, 120, 220, 240VAC 50/60Hz	
Probe	Various probes (refer to page G-33 and G-34)	

Digital Mu-checker

- Single touch zero-set function is standard.
- Switchable measurement ranges make the Mu-checker suitable for a range of applications.
- Dual input.




Digital Mu-checker
519-562A

SPECIFICATIONS

Order No.	519-562A
Type	Differential type digital Mu-Checker (2 connecting heads)
Display range	$\pm 2.000\text{mm}/\pm 0.2000\text{mm}/\pm .08"/\pm .008"$
Resolution	0.001mm/0.0001mm/.00005"/.000005"
Differential mode	$\pm A, \pm B, \pm A \pm B$
Measurement mode	ABS/CMP
Analog output	$\pm 1\text{V}$ \pm Full scale
Digital output	Digimatic code out
External dimension	134(W) x 183(D) x 208(H) mm
Mass	Approx. 2.6kg
Power input	AC adapter 100, 120, 220, 240VAC 50/60Hz
Probe	Various probes (refer to page G-33 and G-34)

Optional Accessories

- SPC Cable for connecting digital Mu-checker (**936937**)
Used for connecting to the digimatic mini-processor.
- Output cable A (**934795**)
Used for connecting to external devices, such as data recorders, etc.



- Analog, limit out (7P) connector (**529035**)
Used for output to external data recorders, sequencers, etc.

- Foot Switch: **937179T**
 - SPC Cable, 1m: **936937**
 - SPC Cable, 2m: **965014**
- Note: for Digital Mu-Checker only



Refer to Bulletin No. (2215) for more details.

SERIES 519 6CH Mu-checker Counter EV-16A

Main features

- External control (Zero-set, Preset etc.)
- Direction switching
- Error messaging
- Tolerance judgment output
- Each data output (RS-232C, BCD, segment)
- Peak measurement (maximum value, minimum value, runout) and arithmetic operation (addition, average, maximum value, minimum value, maximum width) between axes

Optional Accessories

- I/O output connector: **02ADB440**
- D-EV external unit: **02ADD400**
- SPC cable, 0.5m: **02ADD950**
- SPC cable, 1m: **936937**
- SPC cable, 2m: **965014**


- Note 1: To perform calibration a **D-EV (02ADD400)** display unit is required.
At least one **D-EV (02ADD400)** unit is required when using multiple **EV-16A (519-355)**.
- Note 2: As a power supply is not supplied as standard. An appropriate power supply with a current capacity of 1A or more must be provided for each **EV-16A (519-355)**.

- The EV-16A counter unit provides multi-channel electronic micrometer functionality but without a display of the measurement results, which must be purchased separately. (See below.)
- Up to six probes can be connected to one unit. Up to ten counters can be connected to one personal computer using the RS Link function to enable the configuration of a multi-point measurement system comprising a maximum of 60 gages.
- I/O outputs for RS-232C, BCD, tolerance judgment and segment output are available.
- Maximum, minimum and runout measurement between channels (in the same unit) is possible in addition to normal measurement on individual channels.




SYSTEM CONFIGURATION

Mitutoyo probes, EV-16A counters and D-EV display units combined with commercial controllers and personal computers enable construction of a powerful, multi-channel system that can be built to meet the needs of almost any measurement application.

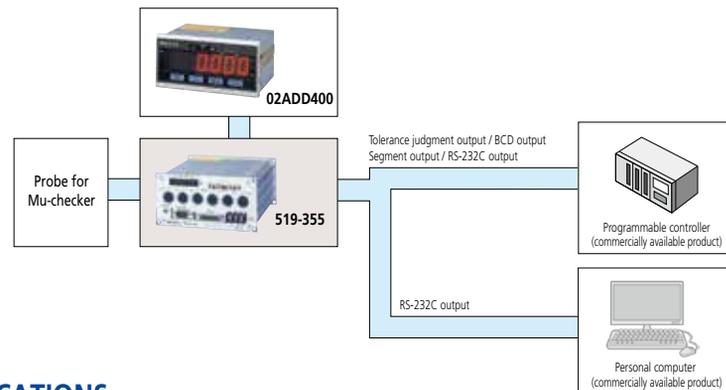

DIMENSIONS

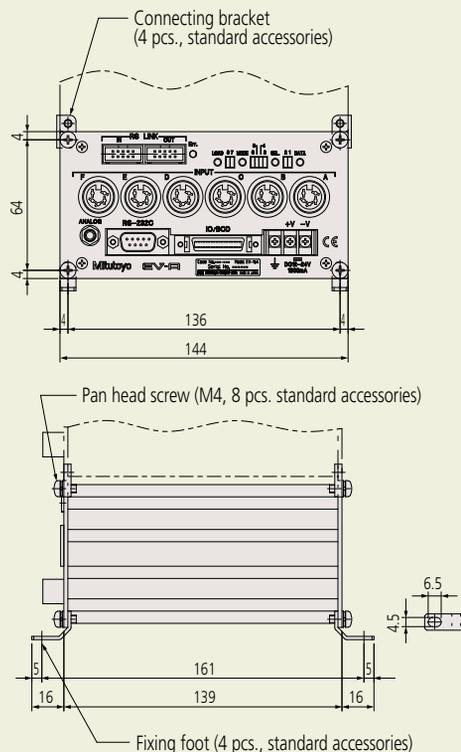

SPECIFICATIONS

Order No.	519-355	
Number of gage inputs	Six	
Display range (mm)	$\pm 2.000, \pm 0.200$	
Resolution (mm)	0.001, 0.0001	
Display processing	8 digits for parameters (display setting), 1 for error display	
Error messaging	Power supply voltage error, Gage error, etc.	
External display	Dedicated external display unit D-EV (optional) can be connected	
Number of input switches	4	
Input switch function	Measurement mode switching, Parameter settings	
I/O	Tolerance judgment output	1 to 6 gages (L1, L2, L3), open-collector
	BCD output	Parallel BCD output (positive/negative-true logic), open-collector
	Segment output	A function to enable only output from the terminal corresponding to the counting values, open-collector
	Control output	Normal operation signal (NOM), open-collector
	Control input	Output channel designation (segment, in BCD mode), presetting, peak value clear, range changeover (at segment output), holding counting value, open-collector or no-voltage contact signal (with/without contact point)
Interface	RS-232C	Measurement data output and control input, EIA RS-232C-compatible Use cross cables for home position DTE (terminal definition)
	RS link	Max. connected units: 10 (6 when using EF counter) Connecting cable length: Max. 10m (sum of link cable length) Data transfer time: 1.1 sec./60ch (when transmission rate is 19200 bps)
Rating	Power supply voltage	Terminal (M3 screw), 12-24VDC
	Current consumption	1A
Operating temperature (humidity) range	0 to 40 °C (RH 20 to 80%, no condensation)	
Storage temperature (humidity) range	-10 to 50 °C (RH 20 to 80%, no condensation)	
External dimensions	144(W) × 72(H) × 139(D) mm	
Mass	Approx. 1000 g	
Standard accessories	Fixing foot (4), connecting bracket (4), fixing screw M4 × 8 (8)	
Applicable probes	For probes, refer to 519 series Mu-checker probes	

Laser Scan Micrometer Selection Guide

MEASURING UNITS

Appearance	Model	Laser Classification	Measuring Range	Resolution (Selectable)
	LSM-6902H*	Visible (650nm), IEC Class 2/ FDA Class II	0.1 - 25mm (.004" - 1.0")	0.01µm - 10µm (.000001" - .0005")
	LSM-500S	Visible (650nm), IEC Class 2/ FDA Class II	0.005 - 2mm (.0002" - .08")	0.01µm - 10µm (.000001" - .0005")
	LSM-501S	Visible (650nm), IEC Class 2/ FDA Class II	0.05 - 10mm (.002" - .4")	0.01µm - 10µm (.000001" - .0005")
	LSM-503S	Visible (650nm), IEC Class 2/ FDA Class II	0.3 - 30mm (.012" - 1.18")	0.02µm - 100µm (.000001" - .005")
	LSM-506S	Visible (650nm), IEC Class 2/ FDA Class II	1 - 60mm (.04" - 2.36")	0.05µm - 100µm (.000002" - .005")
	LSM-512S	Visible (650nm), IEC Class 2/ FDA Class II	1 - 120mm (.04" - 4.72")	0.1µm - 100µm (.000005" - .005")
	LSM-516S	Visible (650nm), IEC Class 2/ FDA Class II	1 - 160mm (.04" - 6.30")	0.1µm - 100µm (.000005" - .005")
 With display unit	LSM-9506 Measuring unit - display unit one-piece structure for bench- top use only	Visible (650nm), IEC Class 2/ FDA Class II	0.5 - 60mm (.02" - 2.36")	0.05µm - 100µm (.000002" - .005")

DISPLAY UNITS

Appearance	Model	Type	Application	Interface Units Equipped
	LSM-6200 LSM-6902H*	Multi-function type	Bench-top use	<ul style="list-style-type: none"> • RS-232C • I/O • Analog output
	LSM-5200**	Compact type (Low cost)	Assembly/ bench-top use (DIN size)	<ul style="list-style-type: none"> • RS-232C • I/O • Analog output • USB***


*LSM-902 and LSM-6902H are factory-set package.

**When connecting with the LSM-500S series, the scanning speed becomes 1600 scans/sec.


***USB connectivity for use with Quicktool and LSM Pak.

■ Measurement Examples


In-line measurement of glass fiber or fine wire diameter

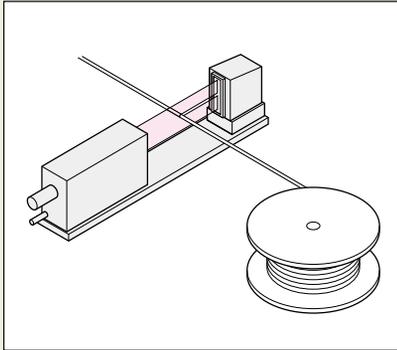


Measurement of outer diameter of cylinder

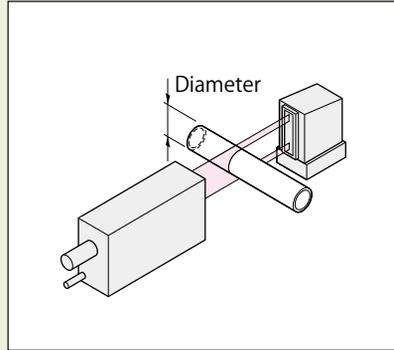


Measurement of outer diameter and roundness of cylinder

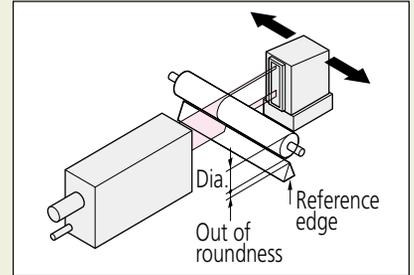


X- and Y-axis measurement of electric cables and fibers

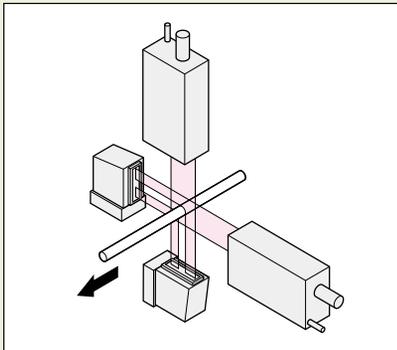


Measurement of thickness of film and sheet

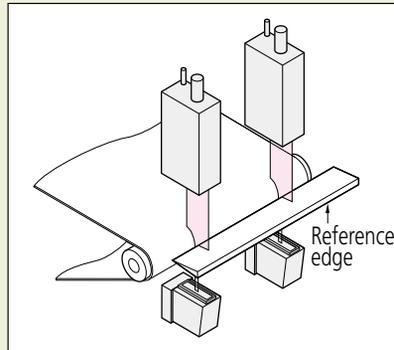


Measurement of spacing of IC chip leads

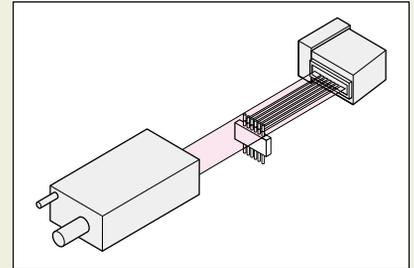


Measurement of film sheet thickness

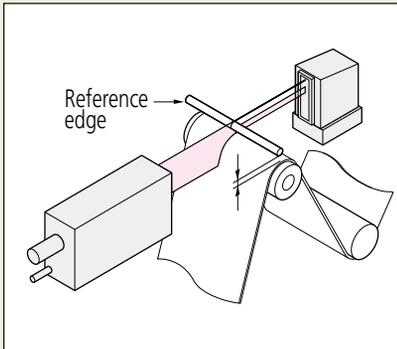


Measurement of laser disk and magnetic disk head movement

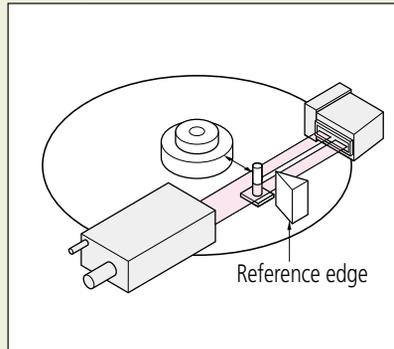


Measurement of gap between rollers

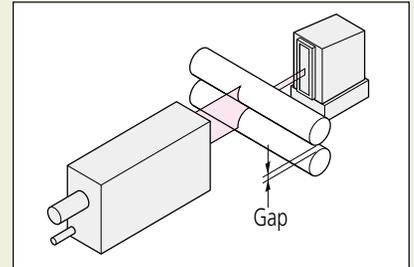


Measurement of tape width

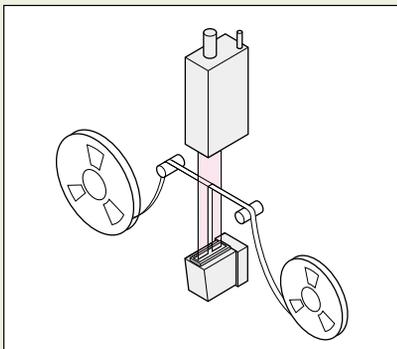


Measurement of outer diameter of optical connector and ferrule

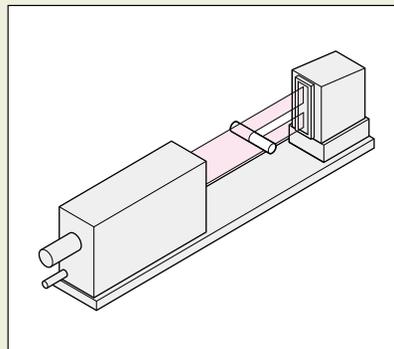

Measurement of form

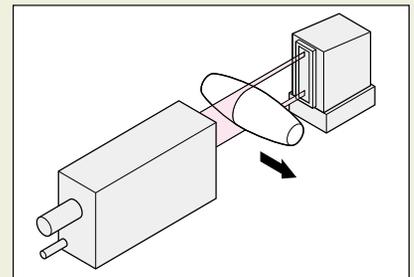

Dual system for measuring a large outside diameter

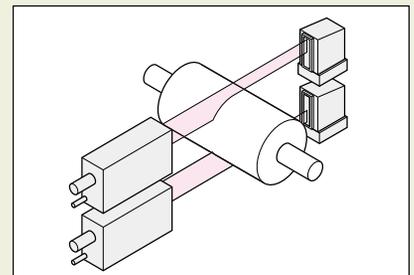

Laser Scan Micrometer LSM-6902H

SERIES 544 — Ultra-high Accuracy Non-contact Measuring System

- Non-contact laser-based measuring system, mainly for outside diameter measurement. Suitable for delicate or moving workpieces.
- Accuracy of $\pm 0.5\mu\text{m}$ in the $\varnothing 0.1 - \varnothing 25\text{mm}$ range can be achieved. It is suitable for pin gage measurement.
- Narrow range accuracy of $\pm(0.3+0.1\Delta D)\mu\text{m}$ for high-precision measurement.
- Ultra-high repeatability of $\pm 0.05\mu\text{m}$.
- The system consists of a measuring unit and a display unit.




SPECIFICATIONS

Set Order No.	544-499A	
Measuring unit		
Type	inch/mm	
Measuring range	0.1 to 25mm (.004 - 1.0")	
Resolution	0.01 to 10 μm (selectable) (.00001 - .0005")	
Repeatability*1	Whole range	$\pm 0.045\mu\text{m}$ (± 0.0000018 in) ($\varnothing 25\text{mm}$)
	Narrow range	$\pm 0.03\mu\text{m}$ (± 0.0000012 in) ($\varnothing 10\text{mm}$)
Accuracy*2 (20°C)	Whole range	$\pm 0.5\mu\text{m}$ (± 0.000020 ")
	Small range	$\pm(0.3+0.1\Delta D)$ [D:mm]*5 $\pm(.000012+.001\Delta D)$ [D:inch]
Positional error*3	$\pm 0.5\mu\text{m}$ (± 0.000020 ")	
Measuring area*4	$\pm 1.5 \times 25\text{mm}$ ($\pm 0.6 \times 1.0$ ")	
Scanning rate	800 scans/s	
Laser wavelength	650nm (Visible)	
Laser scanning speed	56m/s (2240"/sec)	
Operating environment	Temperature	0 to 40°C
	Humidity	RH 35 to 85% (no condensation)

Display unit	
Display	16-digit plus 11-digit fluorescent display, and guide message LED
Segment	1 to 7 (1 to 3, transparent) or 1 to 255 edges
Averaging times	Arithmetic average: per 1 to 2048/ Moving average: per 32 to 2048
Judgment	Selection from target value + tolerance, lower tolerance + upper tolerance, or 7 classes multi-limit tolerance zone.
Measurement mode	Standby, Single measurement, Continuous measurement
Statistical analysis	Maximum, Minimum, Average, Dispersion, σ (S.D)
External dimensions	335 (W) \times 134 (H) \times 250 (D)mm
Power supply	120 V AC $\pm 10\%$, 50W, 60Hz
Standard I/F	RS-232C, Analog I/O
Optional I/F	Digimatic code output unit (2-ch), 2nd I/O analog I/F, BCD I/F
Operating environment	0 to 40°C, RH 35 to 85% (no condensation)
Others	Nominal setting, sample setting, selection of unnecessary digits, transparent object measurement, automatic measurement in edge mode, output timer, abnormal data elimination, SHL change, group judgment, simultaneous measurement, statistical processing, mastering, buzzer function, automatic workpiece detection (dimension/position), zero-set/offset * Measuring unit dual connection, extra-line line measurement, and some of the communication commands are not available.

- *1: Determined by the value of $\pm 2\sigma$ (σ : standard deviation) when measuring $\varnothing 25\text{mm}$ at the interval of 1.28 sec. (average 1024 times).
- *2: At the center of the measuring range.
- *3: An error due to variation in workpiece position either in the optical axis direction or in the scanning direction.
- *4: The area given by [optical axis direction] \times [scanning direction]
- *5: ΔD =Difference in diameter between the master gage and workpiece (Unit: mm)

Measuring Unit External Dimensions

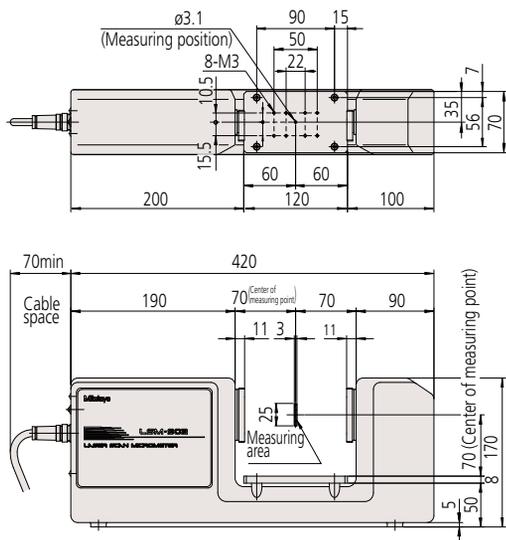

Unit: mm

Optional Accessories


(Refer to page G-46 for details.)

- Calibration gage set ($\varnothing 1.0, \varnothing 25.0$)

- Workstage : **No.02AGD180**
- Adjustable workstage : **No.02AGD270**
- Digimatic code output unit (2-ch) : **No.02AGD280**
- 2nd I/O analog interface unit : **No.02AGC840**
- BCD interface unit : **No.02AGC880**
- BCD interface unit : **No.02AGC910**
- Printer & cable set (120V AC C-type plug) : **No.02AGD600B**
- Printing paper TP411-28CL / 1Pack = 10pcs : **No.223663**
- Foot switch : **No.937179T**

QUICKTOOL

QUICKTOOL is a free downloadable software program that makes programming the LSM-6200 quick and easy. Basic data acquisition is also possible. (Connecting cables to PC are optional)

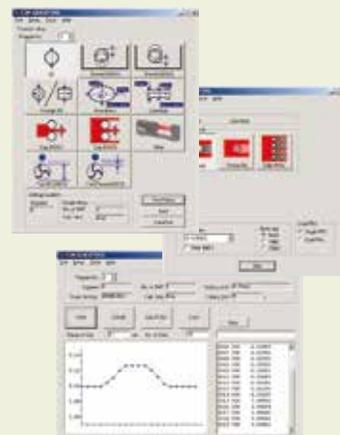

Laser safety

Mitutoyo Laser Scan Micrometers use a low-power visible laser for measurement. The laser is a CLASS 2 EN/IEC60825-1 (2007) device. Warning and explanation labels, as shown below, are attached to the Laser Scan Micrometers as is appropriate.



Laser Scan Micrometer LSM-500S

SERIES 544 — High Accuracy Non-contact Measuring System

Optional Accessories

- Multifunctional display unit, **LSM-6200***:

Order No.	Display type	Remarks
544-072A	English mm/inch	English user's manual

* Included in packages

- Easy-to-operate display unit, **LSM-5200**:

Order No.	Remarks
544-047*	English user's manual

* AC adapter not included


- Calibration gage set (ø0.1, ø2.0) : **No.02AGD110**
- Guide pulley : **No.02AGD200**
- Air blower/purge : **No.02AGD200**
- Extension signal cables: : **No.02AGD220**

Order No.	Cable length
02AGN780A	5m
02AGN780B	10m
02AGN780C	15m

QUICKTOOL

QUICKTOOL is a free downloadable software program that makes programming the LSM-6200 quick and easy.

Basic data acquisition is also possible. (Connecting cables to PC are optional)

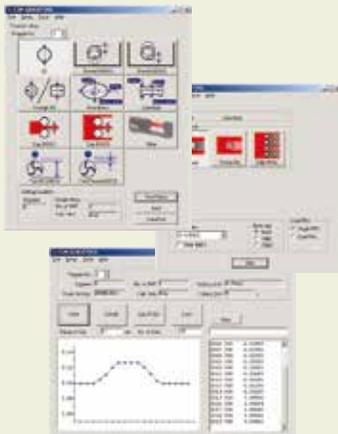

- Capable of measuring down to 5µm outside diameter*1.
- Provides ultra-high accuracy of ±0.3µm over the entire measuring range (5µm to 2mm).
- Ultra-high speed measurement of 3200 scan/sec.
- Suitable for high-speed lines or in applications subject to vibration.



SPECIFICATIONS

Order No. (Laser only)	544-532	
Package No. (with LSM 6200 Display)	64PKA117	
Applicable laser standards	IEC, FDA	
User's manual	English version	
Measuring range	.0002" to .080" (0.005 to 2mm)*1	
Resolution	.00001" to .0005" (0.01 to 10µm) (selectable)	
Repeatability*2	±0.03µm	
Accuracy (20°C)*3	±0.3µm	
Positional error*4	±0.4µm	
Measuring area*5	1×2mm (0.005 to 2mm)	
Scanning rate	3200 scans/s	
Laser wavelength	650nm (Visible)	
Laser scanning speed	76m/s	
Operating environment	Temperature	0 to 40°C
	Humidity	RH 35 to 85% (no condensation)
Protection Level	IP64*6	

*1: The measuring range for the transparent object will be 0.05mm to 2mm. Please consult your local Mitutoyo office for objects smaller than 0.05mm.

The measuring range will be 0.1mm to 2mm in the 1 to 255 edge measurement mode or when activating the automatic workpiece detection.

If using the optional dual-connection unit for LSM-6200, the measuring range will be 0.05mm to 2mm.

*2: Determined by the value of ±2σ (σ: standard deviation) when measuring ø2mm at the interval of 0.32 sec. (average 1024 times).

*3: Center of the measuring range for cylindrical workpieces outside diameter.


*4: An error of the outside diameter due to variation in workpiece position either in the optical axis direction or in the scanning direction.

*5: The area given by [optical axis direction]×[scanning direction].

*6: If the workpiece or glass of the measuring unit window is soiled by water or dust, the unit may malfunction.

Note: When using extra-fine line measurement function (FINE), guide messages for setting the following will not be displayed: dual-measurement, segment designation, automatic workpiece detection and group judgment.

DIMENSIONS

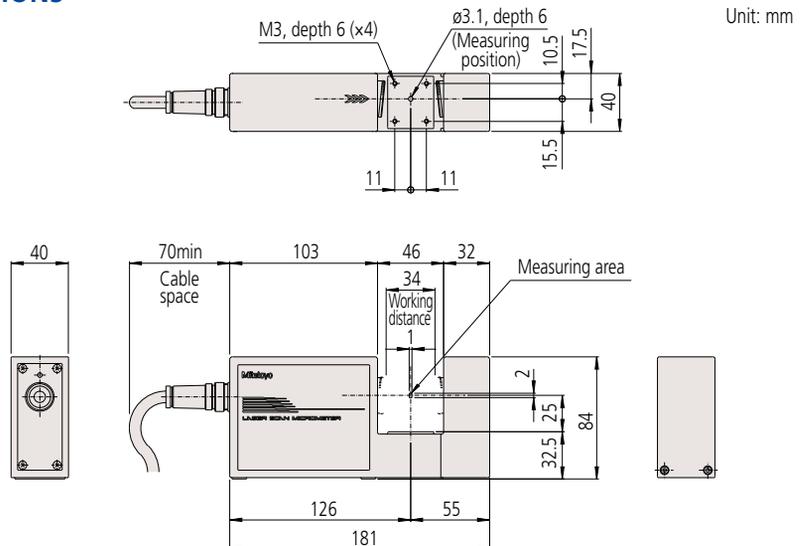

Laser safety

Mitutoyo Laser Scan Micrometers use a low-power visible laser for measurement. The laser is a CLASS 2 EN/IEC60825-1 (2007) device. Warning and explanation labels, as shown below, are attached to the Laser Scan Micrometers as is appropriate.



Laser Scan Micrometer LSM-503S

SERIES 544 — High-accuracy Non-contact Measuring System

Optional Accessories

- Multifunctional display unit, **LSM-6200***:

Order No.	Display type	Remarks
544-072A	English mm/inch	English user's manual

* Included in packages

- Easy-to-operate display unit, **LSM-5200**:

Order No.	Remarks
544-047*	English user's manual

* AC adapter not included

- Calibration gage set (ø0.1, ø30.0)

: **No.02AGD130**

- Adjustable workstage

: **No.02AGD490**

- Air blower/purge

: **No.02AGD240**

- Workstage

: **No.02AGD270**

- Extension signal cables

Order No.	Cable length
02AGN780A	5m
02AGN780B	10m
02AGN780C	15m
02AGN780D	20m


- Extension relay cables

Order No.	Cable length
02AGC150A	1m
02AGC150B	3m
02AGC150C	5m

QUICKTOOL

QUICKTOOL is a free downloadable software program that makes programming the LSM-6200 quick and easy.

Basic data acquisition is also possible. (Connecting cables to PC are optional)

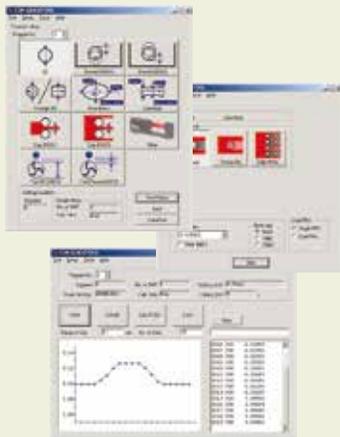

Laser safety

Mitutoyo Laser Scan Micrometers use a low-power visible laser for measurement. The laser is a CLASS 2 EN/IEC60825-1 (2007) device. Warning and explanation labels, as shown below, are attached to the Laser Scan Micrometers as is appropriate.



- Ensures $\pm 1.0\mu\text{m}$ accuracy over the entire measuring range (0.3 to 30mm).
- Narrow range accuracy of $\pm(0.6+0.1\Delta D)\mu\text{m}$ for high-precision measurement.

- Ultra-high speed measurement of 3200 scan/sec. Suitable for high-speed lines or in applications subject to vibration.




SPECIFICATIONS

Order No. (Laser only)	544-536	
Package No. (Laser w/LSM 6200 display)	64PKA119	
Applicable laser standards	IEC, FDA	
User's manual	English version	
Measuring range	.012" to 1.18" (0.3 to 30mm)	
Resolution	.000001" to .005" (0.02 to 100 μm) (selectable)	
Repeatability*1	$\pm 0.11\mu\text{m}$	
Accuracy*2 (20°C)	Whole range	
	Small range	$\pm(0.6+0.1\Delta D)\mu\text{m}^*3$
Positional error*4	$\pm 1.5\mu\text{m}$	
Measuring area*5	10x30mm (0.3 to 30mm)	
Scanning rate	3200 scans/s	
Laser wavelength	650nm (Visible)	
Laser scanning speed	226m/s	
Operating environment	Temperature	0 to 40°C
	Humidity	RH 35 to 85% (no condensation)
Protection Level	IP64*6	

- *1: Determined by the value of $\pm 2\sigma$ (σ : standard deviation) when measuring ø30mm at the interval of 0.32 sec. (average 1024 times).
- *2: Center of the measuring range for cylindrical workpieces outside diameter.
- *3: ΔD =Difference in diameter between the master gage and workpiece (Unit: mm).
- *4: An error of the outside diameter due to variation in workpiece position either in the optical axis direction or in the scanning direction.
- *5: The area given by [optical axis direction]x[scanning direction].
- *6: The protection level provided for the interior. If the workpiece or glass of the measuring unit window is soiled by water or dust, the unit may malfunction.

DIMENSIONS

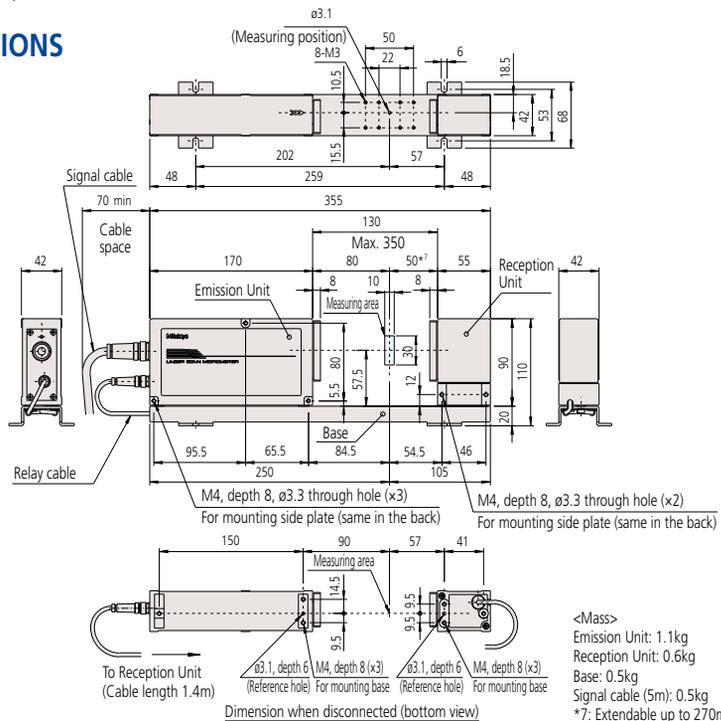

Laser Scan Micrometer LSM-512S

SERIES 544 — High-accuracy Non-contact Measuring System

Optional Accessories

- Multifunctional display unit, **LSM-6200***:

Order No.	Display type	Remarks
544-072A	English mm/inch	English user's manual

* Included in packages

- Easy-to-operate display unit, **LSM-5200**:

Order No.	Remarks
544-047*	English user's manual

* AC adapter not included

- Calibration gage set (ø20.0, ø120.0)

: **No.02AGD150**

: **No.02AGD260**

- Air blower/purge
- Extension signal cables

Order No.	Cable length
02AGN780A	5m
02AGN780B	10m
02AGN780C	15m
02AGN780D	20m


- Extension relay cables

Order No.	Cable length
02AGC150A	1m
02AGC150B	3m
02AGC150C	5m

QUICKTOOL

QUICKTOOL is a free downloadable software program that makes programming the LSM-6200 quick and easy.

Basic data acquisition is also possible. (Connecting cables to PC are optional)

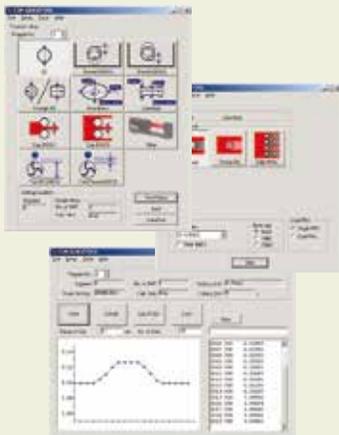

Laser safety

Mitutoyo Laser Scan Micrometers use a low-power visible laser for measurement. The laser is a CLASS 2 EN/IEC60825-1 (2007) device. Warning and explanation labels, as shown below, are attached to the Laser Scan Micrometers as is appropriate.



- Ensures $\pm 6\mu\text{m}$ accuracy over the entire measuring range (1 to 120mm).

- Narrow range accuracy of $\pm(4.0+0.5\Delta D)\mu\text{m}$ for high-precision measurement.
- Ultra-high speed measurement of 3200 scan/sec. Suitable for high speed-lines or in applications subject to vibration.



SPECIFICATIONS

Order No. (Laser only)	544-540
Package No. (Laser w/ LSM 6200 display)	64PKA121
Applicable laser standards	IEC, FDA
User's manual	English version
Measuring range	.040" to 4.72" (1 to 120mm)
Resolution	.000005" to .005" (0.1 to 100μm) (selectable)
Repeatability*1	$\pm 0.85\mu\text{m}$
Accuracy*2	$\pm 6\mu\text{m}$
Whole range (20°C)	$\pm(4.0+0.5\Delta D)\mu\text{m}^{*3}$
Small range	$\pm 8\mu\text{m}$
Positional error*4	$\pm 8\mu\text{m}$
Measuring area*5	30x120mm (1 to 120mm)
Scanning rate	3200 scans/s
Laser wavelength	650nm (Visible)
Laser scanning speed	904m/s
Operating environment	Temperature: 0 to 40°C
Humidity	RH 35 to 85% (no condensation)
Protection level	IP64*6

*1: Determined by the value of $\pm 2\sigma$ (σ : standard deviation) when measuring ø120mm at the interval of 0.32 sec. (average 1024 times).

*2: Center of the measuring range for cylindrical workpieces outside diameter.


*3: ΔD =Difference in diameter between the master gage and workpiece (Unit: mm)

*4: An error of the outside diameter due to variation in workpiece position either in the optical axis direction or in the scanning direction.

*5: The area given by [optical axis direction]x[scanning direction].

*6: The protection level provided for the interior. If the workpiece or glass of the measuring unit window is soiled by water or dust, the unit may malfunction.

DIMENSIONS

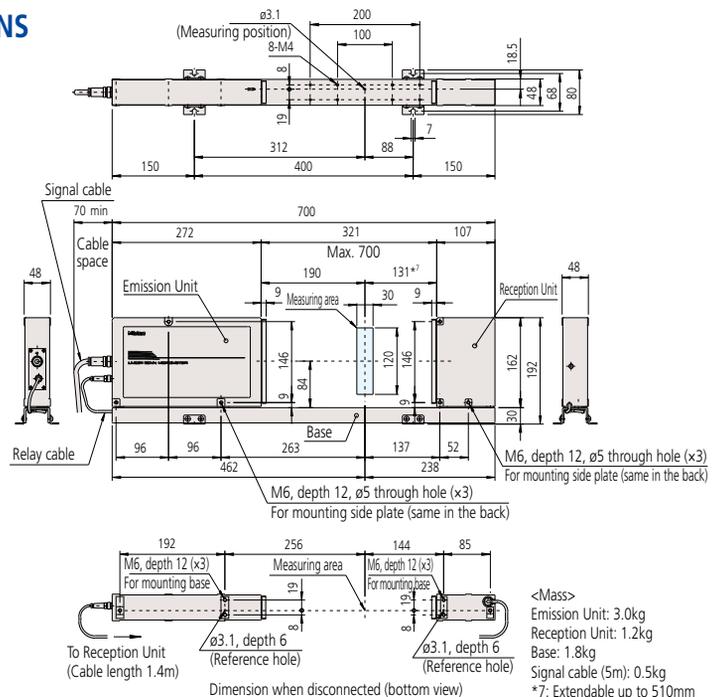

Laser Scan Micrometer LSM-516S

SERIES 544 — High-accuracy Non-contact Measuring System

- Ensures $\pm 7\mu\text{m}$ accuracy over the entire measuring range (1 to 160mm).
- Narrow range accuracy of $\pm(4.0+2.0\Delta D)\mu\text{m}$ for high-precision measurement.
- Ultra-high speed measurement of 3200 scan/sec.
- Suitable for high-speed lines or in applications subject to vibration.

IP64




SPECIFICATIONS

Order No. (Laser only)	544-542	
Package No. (Laser w/ LSM 6200 display)	64PKA122	
Applicable laser standards	IEC, FDA	
User's manual	English version	
Measuring range	.040" to 6.3" (1 to 160mm)	
Resolution	.000005" to .005" (0.1 to 100 μm) (selectable)	
Repeatability*1	$\pm 1.4\mu\text{m}$	
Accuracy*2 (20°C)	Whole range	$\pm 7\mu\text{m}$
	Small range	$\pm(4.0+2.0\Delta D)\mu\text{m}$ *3
Positional error*4	$\pm 8\mu\text{m}$	
Measuring area*5	40x160mm (1 to 160mm)	
Scanning rate	3200 scans/s	
Laser wavelength	650nm (Visible)	
Laser scanning speed	1206m/s	
Operating environment	Temperature	0 to 40°C
	Humidity	RH 35 to 85% (no condensation)
Protection level	IP64*6	

- *1: Determined by the value of $\pm 2\sigma$ (σ : standard deviation) when measuring $\phi 160\text{mm}$ at the interval of 0.32 sec. (average 1024 times).
 *2: Center of the measuring range for cylindrical workpieces outside diameter.
 *3: ΔD =Difference in diameter between the master gage and workpiece (Unit: mm)
 *4: An error of the outside diameter due to variation in cylinder position either in the optical axis direction or in the scanning direction.
 *5: The area given by [optical axis direction]x[scanning direction].
 *6: The protection level provided for the interior. If the workpiece or glass of the measuring unit window is soiled by water or dust, the unit may malfunction.

DIMENSIONS

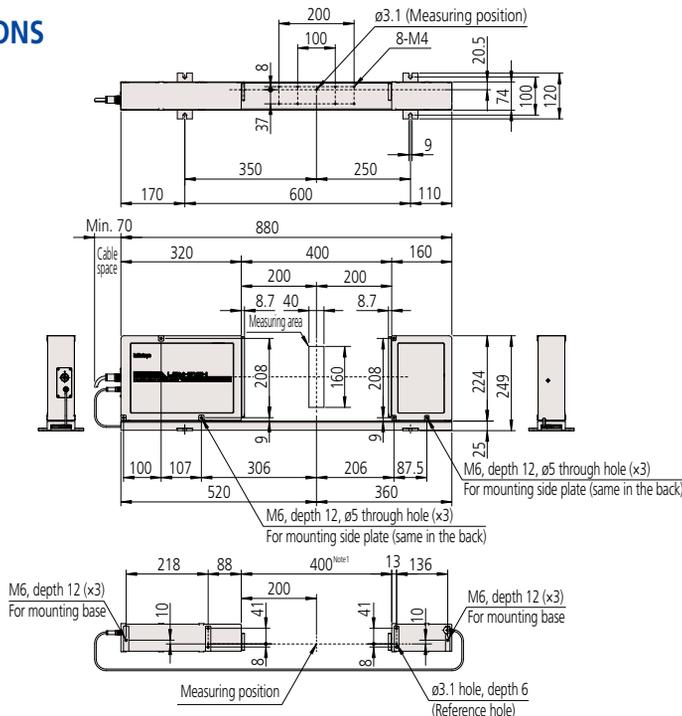

Note 1: Distance between emission unit and reception unit: 400mm to 800mm

Optional Accessories

- Multifunctional display unit, **LSM-6200***:

Order No.	Display type	Remarks
544-072A	English mm/inch	English user's manual

* Included in packages

- Easy-to-operate display unit, **LSM-5200:**

Order No.	Remarks
544-047*	English user's manual

* AC adapter not included

- Calibration gage set ($\phi 20, \phi 160$)

: No.02AGM300

- Extension signal cables


Order No.	Cable length
02AGN780A	5m
02AGN780B	10m
02AGN780C	15m
02AGN780D	20m

- Extension relay cables

Order No.	Cable length
02AGC150A	1m
02AGC150B	3m
02AGC150C	5m

QUICKTOOL

QUICKTOOL is a free downloadable software program that makes programming the LSM-6200 quick and easy. Basic data acquisition is also possible. (Connecting cables to PC are optional)

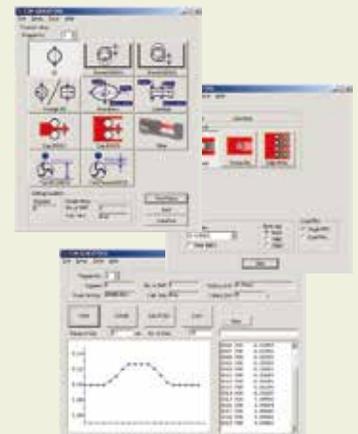

Laser safety

Mitutoyo Laser Scan Micrometers use a low-power visible laser for measurement. The laser is a CLASS 2 EN/IEC60825-1 (2007) device. Warning and explanation labels, as shown below, are attached to the Laser Scan Micrometers as is appropriate.



Laser Scan Micrometer LSM-9506

SERIES 544 — Bench-top Type Non-contact Measuring System

Optional Accessories

02AGD170

Calibration gage set (ø1.0mm, ø60mm)



02AGD680 Adjustable workstage

02AGD580 Center support*

02AGD590 Adjustable V-block*

936937 SPC output cable (1m)

937179T Footswitch

264-016 USB input tool for spreadsheets (SPC cable also required)

*Use with an adjustable workstage.

*1: Determined by the value for $\pm 2\sigma$ at the measurement interval of 0.32 sec.

*2: At the center of the measuring region.

*3: An error due to workpiece shift either in the optical axis direction or in the scanning direction. L= Distance between the center of workpiece and the center of optical axis (in mm or inches).


*4: The area given by measuring range on the optical axis x measuring range in the scanning direction.

*5: FDA Class II (544-116-1A) semiconductor laser for scanning (Maximum power: 1.0mW)

QUICKTOOL

QUICKTOOL is a free downloadable software program that makes programming the LSM-6200 quick and easy.

Basic data acquisition is also possible. (Connecting cables to PC are optional)

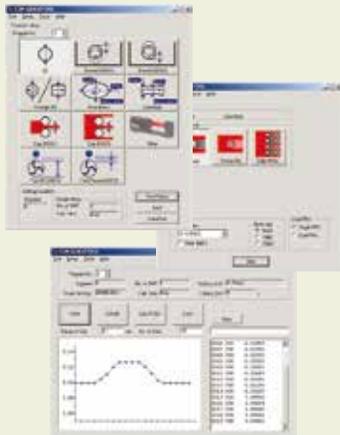

- Bench-top type with integrated display unit includes many functions equivalent to the multi-function display unit.



SPECIFICATIONS

Order No.	544-116-1A
Type	inch/mm
Measuring range	.02" - 2.36"/0.5 - 60mm
Resolution	.000002" - .005"/0.00005 - 0.1mm
Repeatability*1	$\pm 0.6\mu\text{m}$ ($\pm 0.00003"$)
Accuracy*2 (20°C)	$\pm 2.5\mu\text{m}$ ($\pm 0.0001"$)
Positional error*3 (optical axis/scanning direction)	$\pm 2.5\mu\text{m}$ ($\pm 0.0001"$)
Measuring area*4	L: Displacement between workpiece center and optical axis center $\pm 5 \times 60\text{mm}$ ($\pm 2 \times 2.36"$)
Scanning rate	1600 scans/s
Laser wavelength	650nm (Visible)*5
Laser scanning speed	226m/s (8900" / s)
Display unit	16-digit dot matrix (upper column) + 7 segment 11-digit (lower column), guidance LEDs
Standard interface	RS-232C, Digimatic code output unit (1ch)
Optional interface	No
Power supply	120 V AC $\pm 10\%$, 40VA, 60Hz
Operating environment	0 to 40°C, RH 35 to 85% (no condensation)

*1: Determined by the value of $\pm 2\sigma$ (σ : standard deviation) when measuring ø10mm at the interval of 0.32 sec. (average 1024 times).


*2: Center of the measuring range for cylindrical workpieces outside diameter.

*3: An error of the outside diameter due to variation in workpiece position either in the optical axis direction or in the scanning direction.

*4: The area given by [optical axis direction] x [scanning direction].

*5: FDA Class II (544-116-1A)/IEC Class 2 semiconductor laser for scanning. (Maximum power: 1.0mW)

DIMENSIONS

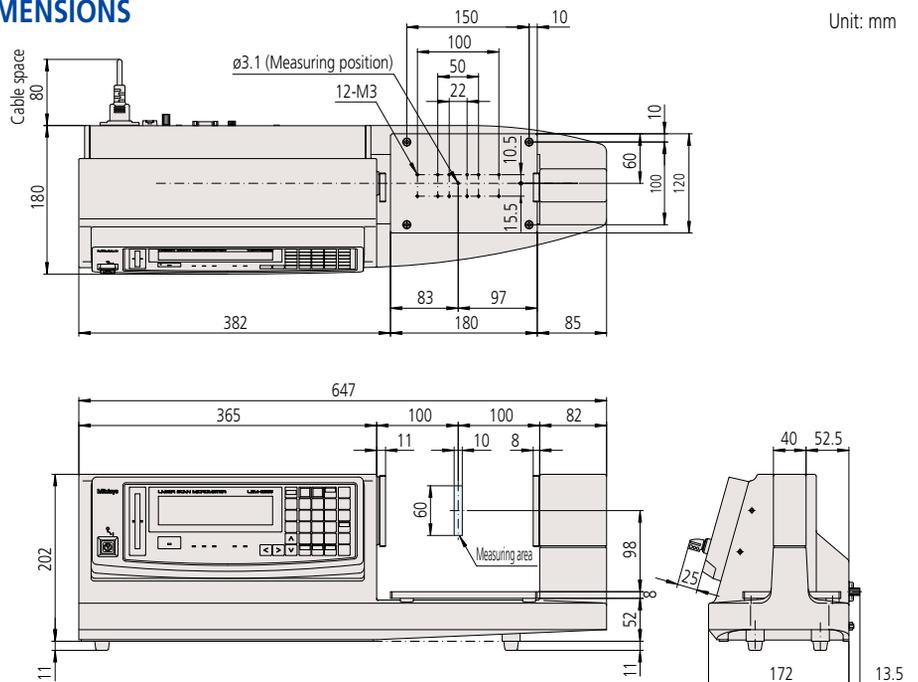

Laser safety

Mitutoyo Laser Scan Micrometers use a low-power visible laser for measurement. The laser is a CLASS 2 EN/IEC60825-1 (2007) device. Warning and explanation labels, as shown below, are attached to the Laser Scan Micrometers as is appropriate.



LSM-6200 Display Unit

SERIES 544 — Standard Display Unit for Laser Scan Micrometer

- 2-axis display unit enables 2 items to be displayed simultaneously.
- Capable of statistical analysis such as: average, maximum value, minimum value, range (max. - min.) and more.
- Segment measurement (7 points) or edge measurement (1 to 255 edge) can be selected.
- A function to eliminate abnormal values is standard.
- 100 tolerance values, preset values or settings can be stored.



SPECIFICATIONS

Order No.	544-072A
Type	inch/mm
Display	16-digit plus 11-digit fluorescent display and guide message LED
Segment	1 to 7 (1 to 3, transparent) or 1 to 255 edges* ¹
Averaging method	Arithmetic average: per 8 to 2048/ Moving average: per 32 to 2048 (Arithmetic average is per 16 to 2048 when using 544-531, 544-532)
Judgment	Selection from target value + tolerance, lower tolerance + upper tolerance, or 7 classes multi-limit tolerance zone.
Measurement mode	Standby, Single measurement, Continuous measurement
Statistical analysis	Maximum, Minimum, Average, Dispersion, σ (S.D)
Size	335 (W) \times 134 (H) \times 250 (D)mm
Power supply	120 V AC \pm 10%, 40VA, 60Hz
Standard I/F	RS-232C, Analog I/O
Optional I/F	Digimatic code output unit (2-ch), 2nd I/O analog I/F, BCD I/F
Operating environment	0 to +45°C, RH 35 to 85% (no condensation)
Others	Nominal setting, sample setting, selection of unnecessary digits, transparent object measurement* ² , measurement of odd fluted parts, automatic measurement in edge mode, output timer, abnormal data elimination, SHL change, group judgment, simultaneous measurement, statistical processing, mastering, buzzer function, automatic workpiece detection (dimension/position)* ¹ , zero-set/offset, dual measurement (optional)


*1: The measuring range will be 0.1mm to 2mm in the 1 to 255 edge measurement mode or when activating the automatic workpiece detection with **544-531, 544-532**.
Each function has its combination limit.

*2: The measuring range is 50 μ m to 2mm when using **544-531, 544-532**. For smaller range, contact your local Mitutoyo sales office.

** Cannot be connected to **544-499A**.

** Previous models such as **544-451** cannot be connected.

DIMENSIONS

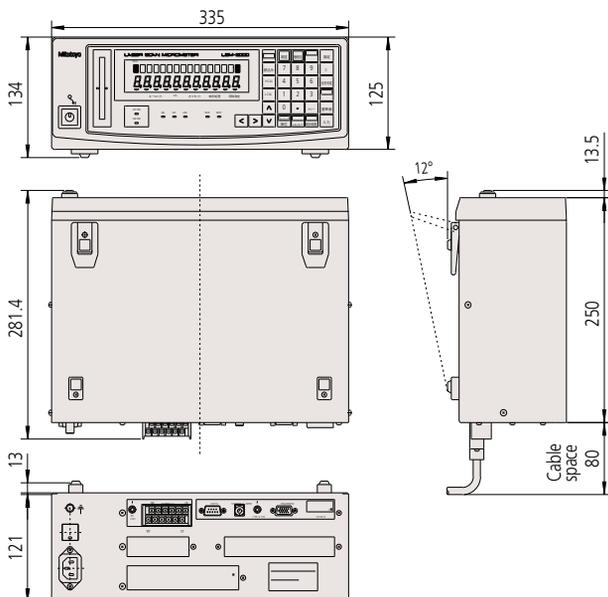



Unit: mm

Optional Accessories

- 12AAA807** Serial cable (RS-232C null)
- 937179T** Footswitch
- 02AGN780A, B, C, D** Extension Signal Cables
- 02AGC840** Digimatic output card
- 02AGP150** Dual Input Card
- 02AGC910** BCD output
- 02AGC880** 2nd analog output card
- 02AGD600B** Printer

QUICKTOOL

QUICKTOOL is a free downloadable software program that makes programming the LSM-6200 quick and easy. Basic data acquisition is also possible. (Connecting cables to PC are optional)

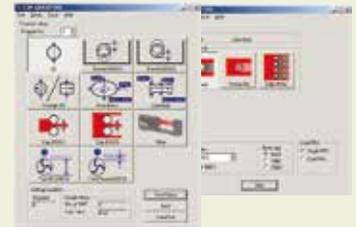

LSM-5200 Display Unit


SERIES 544 — Compact Display Unit for Real-time Multi-channel Measurement

- A compact controller which could be used for multi-unit system configurations.
- Capable of simple connection to a PC via USB.
- A panel-mount type display unit designed for the LSM-S series.
- Analog I/O and RS-232C is standard.
- Measurement of odd fluted parts, and simultaneous measurement / 2-program function included.



QUICKTOOL

QUICKTOOL is a free downloadable software program that makes programming the LSM-6200 quick and easy. Basic data acquisition is also possible. (Connecting cables to PC are optional)

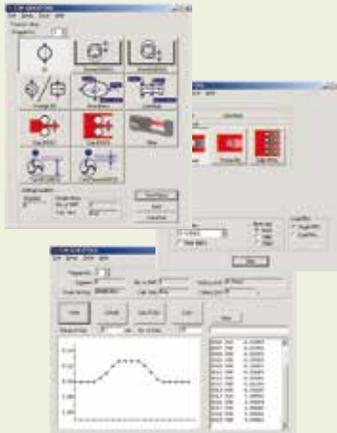

SPECIFICATIONS

Order No.	544-047
Display	9 digits plus 8 digits LED, guide message LED
Segment	1 to 7 (1 to 3, transparent) or 1 to 255 edges*1
Averaging method	Arithmetic average: from 4 to 2048; Moving average: from 32 to 2048 (Arithmetic average is from 16 to 2048 when using LSM-500S.)
Judgment	Selecting from target value \pm tolerance value or lower limit/upper limit.
Measurement mode	Standby, Single measurement, Continuous measurement
Statistical analysis	Calculation result is output via USB or RS-232C.
External dimensions	144 (W) \times 72 (H) \times 197.1 (D)mm
Power supply*3	24V DC \pm 10%, 1.3A or more (AC adapters are optional)
Standard I/F	USB2.0, RS-232C, I/O analog
Operating environment	0 to 40°C, RH 35 to 85% (no condensation)
Preservation environments	-20 to 70°C, RH 35 to 85% (no condensation)
Others	Measurement of odd fluted parts, simultaneous measurement, nominal setting, sample setting, selection of unnecessary digits, transparent object measurement*2 Automatic workpiece detection (dimension/position detected)*1, abnormal data elimination, mastering, statistical processing (when using USB, RS-232C), output timer, automatic measurement in edge mode, presetting note that every function is limited in its combination possibilities. See the user manual for details.
Mass	1.4 kg

*1: The measuring range will be 0.1mm to 2mm in the 1 to 255 edge measurement mode or when activating the automatic workpiece detection with **544-531, 544-532**. Each function has its combination limit.

*2: The measuring range is 50 μ m to 2mm when using **544-531, 544-532**. For smaller ranges, contact your local Mitutoyo sales office.


*3: DC24V external power supply (commercial item) is required separately.

Note 1: Cannot be connected to **544-499A**.

Note 2: Previous models such as **544-451** cannot be connected.

Note 3: For USB communication with a PC, a dedicated device driver is required. For details, contact your local Mitutoyo sales office.

DIMENSIONS

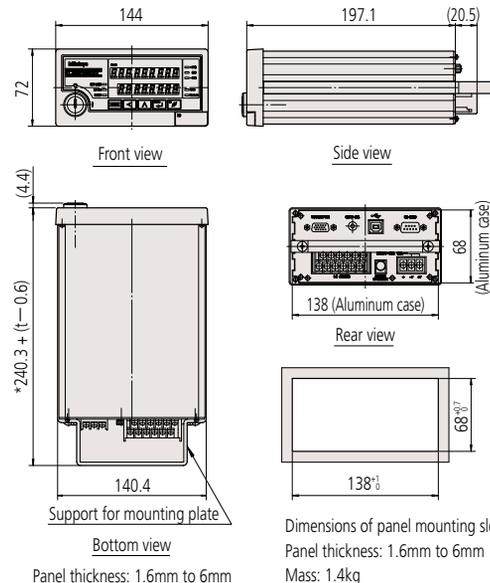

Dimensions of panel mounting slot (DIN 43 700-144 \times 76)
 Panel thickness: 1.6mm to 6mm
 Mass: 1.4kg

Laser Scan Micrometer

SERIES 544 Optional Accessories

Calibration Gage Set



- Standard cylinder gage set suitable for calibration of Laser Scan Micrometers.
- Nominal gage diameters (1 to 160mm) are as given in specifications.



SPECIFICATIONS

For calibrating models	544-499A	544-532	544-534	544-536	544-538	544-540	544-542	544-116-1A	
	LSM-6902H	LSM-500S	LSM-501S	LSM-503S	LSM-506S	LSM-512S	LSM-516S	LSM-9506	
Set No.	02AGD180	02AGD110	02AGD120	02AGD130	02AGD140	02AGD150	02AGM300	02AGD170	
Configuration (Order No.)	Stand	02AGD181	02AGD111	02AGD121	02AGD131	02AGD141	02AGD151	02AGM320	02AGD171
	Gages	ø1: 02AGD920 ø25: 02AGD963	ø0.1: 958200 ø2: 958202	ø0.1: 958200 ø10: 229317	ø1: 02AGD920 ø30: 02AGD961	ø1: 02AGD920 ø60: 02AGD962	ø20: 229730 ø120: 234072	ø20: 229730 ø160: 02AGM303	ø1: 02AGD920 ø60: 02AGD962
	Carrying case	02AGD190	958203	958203	02AGD980	02AGD980	02AGD990	02AGM310	02AGD970

Workstage



Installation example


- Easy set-up and height adjustment enables high-precision measurement.

SPECIFICATIONS

Model	544-534 544-536 544-499A
Order No.	02AGD270


Adjustable workstage

- Vertical/horizontal slide mechanism enables easy measurement of various workpiece diameters.
- Best suited for quality assurance of high-precision pin gages.




Measurement Examples

- Roller of copying machine



- Pin gage or plug gage



Basic configuration

Basic set	Order No.	Applicable model	Standard accessories	Measuring range (mm)	Horizontal stroke (mm)	Vertical stroke (mm)
(1) Main unit (2) V-block (3) Stop	02AGD280	544-499A	V-block (02AGD420), 2 pcs Stopper (02AGD430), 1 pc	0.1 - 25	130	47
	02AGD400	544-534		0.05 - 10	130	32
	02AGD490	544-536		0.3 - 30	200	35
	02AGD520	544-538	V-block A (02AGD550), 2 pcs V-block B (02AGD550), 1 pc V-block C (02AGD570), 1 pc	1 - 60	300	45
	02AGD370	544-116-1A		0.5 - 60	200	45
	02AGD680			0.5 - 60	300	45

* The stop is not included in the basic set for 544-538, 544-116.


- Optional parts for the adjustable workstage, such as center support, adjustable V-block (up/down) etc., are available.

Laser Scan Micrometer

SERIES 544 Optional Accessories

Guide pulley

- Used for supporting measurement of outside diameter of fine wire-like materials such as magnetic wire or fiber.



SPECIFICATIONS

Model	544-532	544-534
Order No.	02AGD200	02AGD210

Each measurement range is as follows:


544-532: $\varnothing 5\mu\text{m}$ to $\varnothing 1.6\text{mm}$

544-534: $\varnothing 50\mu\text{m}$ to $\varnothing 2\text{mm}$

For calibration, the calibration gage set for **544-532 (No.02AGD110)** is required.

Air shield driven by air supply unit

- Air blows from the air outlet installed on the laser section to clear dust from adhering to the laser window.

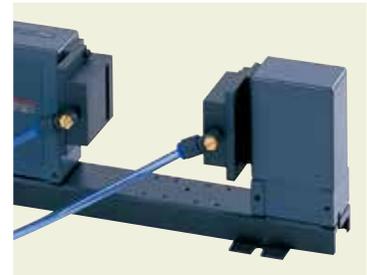

SPECIFICATIONS

Air supply unit	Air shield	Applicable models
No.957608	No.02AGD220	544-532
	No.02AGD230	544-534
	No.02AGD240	544-536
	No.02AGD250	544-538
	No.02AGD260	544-540

Air shield	Quantity
No.02AGD220/No.02AGD230	6
No.02AGD240	3
No.02AGD250/No.02AGD260	1


*1: Air shield and air supply unit are sold separately. An air supply unit includes a flow regulating valve and filter. Note, however, that clean air should be supplied.

*2: Air shield is supplied with 5m air tube (Outside diameter: 6mm).

*3: Air supply unit is compatible with air tube of 9mm internal diameter.

Extension Signal Cable / Extension Relay Cable

- Extension signal cables are necessary when the measuring unit and display unit are separated in operation. Extension relay cables are necessary when the optical section is separated in operation.

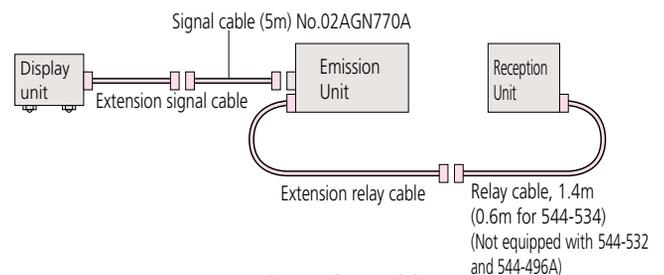

SPECIFICATIONS

Extension Signal Cable

Order No.	Cable length
02AGN780A	5m
02AGN780B	10m
02AGN780C	15m
02AGN780D	20m

Extension Relay Cable

Order No.	Cable length
02AGC150A	1m
02AGC150B	3m
02AGC150C	5m

* For **544-532** and **544-534** the allowable maximum length for signal cable is 20m; relay cable is 2m.

* For **544-536, 544-538, 544-540** and **544-542** the allowable maximum length for signal cable is 30m; relay cable is 5m.

* The maximum extension length of the signal cable and relay cable is 32m in total.

* Cannot be used with **544-499A**.

Laser Scan Micrometer

SERIES 544 Optional Accessories

Thermal printer DPU-414



- Measurement data can be printed.

SPECIFICATIONS

Order No.	02AGD600B
Printing method	Thermal dot matrix
Printing capacity	40 Columns (Normal)
Character configuration	9×8 dot matrix
Printing direction	Bidirectional
Interface	RS-232C
Power supply	AC 100-240V 50/60Hz (AC adapter)
Standard accessories	Printer cable 2m (02AGD620A), Printer paper 1 roll, AC adapter
Printer paper (optional)	Order No. 223663 (10-roll set)

Foot switch




- **937179T**
- For LSM order **544-072A, 544-499A** , **544-116-1A**

Interface for LSM6200, 6900

Optional Accessories

BCD Interface

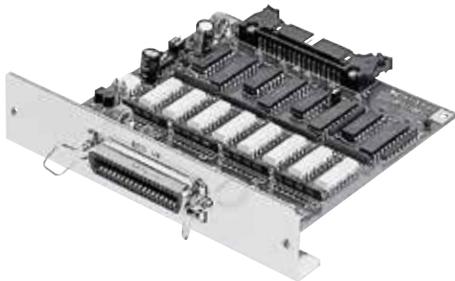

- Outputs measurement data in BCD output (7-digit) or HEX output.
- Data logic can be switched.
- Isolated I/O circuitry
- Available for **544-072A, 544-499A** .


SPECIFICATIONS

Order No.	02AGC910
Standard accessories	Connector (DDK) 57-30360 (No.214188)

Laser Scan Micrometer


SERIES 544 Optional Accessories

XY Measurement




(X-Y): flatness
 (X+Y)/2: average
 * XY requires 10mm-interval.

Parallel Measurement



Large-diameter Measurement



Digimatic Code Output Unit



- 2-channel digimatic code output
- In simultaneous measurement, measurement data are output as follows:
 Program No.0 to No.4 in OUTPUT-1
 Program No.5 - No.9 in OUTPUT-2 (10 programs operated)
- 10 pin MIL type connector.
- Output cable is not supplied.
 Connecting cable (optional) 1m (No.936937)
- Available for **544-072A, 544-499A** .

SPECIFICATIONS

Order No.	02AGC840
-----------	-----------------

- * Output is 6 digits of measurement data.
- * Displaying 6th and 7th digit after the decimal point is not supported.

Dual Connection Unit




- Enables second unit connection to the **544-072A**. (both units must be the same model)
- * Cannot be used for **544-499A** .
- Depending on the layout of the two measuring units, large-diameter measurement, XY measurement and parallel measurement are possible.
- Both of the measuring units and display units can be simultaneously operated.

SPECIFICATIONS

Order No.	02AGP150
-----------	-----------------

2nd I/O Analog I/F

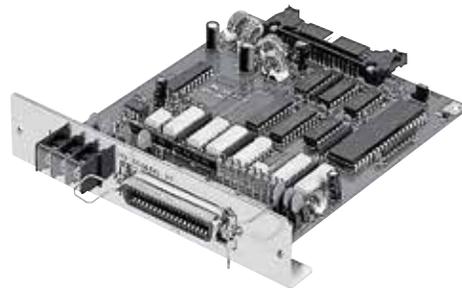

- I/O, analog output.
- Simultaneous measurement is supported by two pairs of go/no-go judgment outputs.
- Available for **544-072A, 544-499A** .

SPECIFICATIONS

Order No.	02AGC880
Standard accessories	Connector (DDK) 57-30360 (No.214188)


Cable for BCD and 2nd I/O Simultaneous Mount

- Both BCD (No.02AGC910) and 2nd I/O analog I/F (No.02AGC880) can be mounted on **544-072A, 544-499A** using this cable.
- * If using this cable, the dual-connection unit (No.02AGP150) cannot be used.


SPECIFICATIONS

Order No.	02AGE060
-----------	-----------------

DIMENSIONS

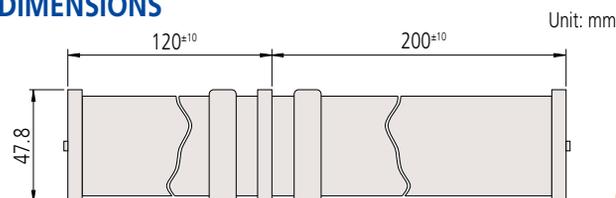

Quick Guide to Precision Measuring Instruments



Laser Scan Micrometers

Compatibility

Your laser scan micrometer has been adjusted together with the ID unit, which is supplied with the measuring unit. The ID unit, which has the same code number and the same serial number as the measuring unit, must be installed in the display unit. This means that if the ID unit is replaced, the measuring unit can be connected to another corresponding display unit.

The workpiece and measuring conditions

Depending on whether the laser is visible or invisible, the workpiece shape, and the surface roughness, measurement errors may result. If this is the case, perform calibration with a master workpiece which has dimensions, shape and surface roughness similar to the actual workpiece to be measured. If measurement values show a large degree of dispersion due to the measuring conditions, increase the number of scans for averaging to improve the measurement accuracy.

Electrical interference

To avoid operational errors, do not route the signal cable and relay cable of the laser scan micrometer alongside a high voltage line or other cables capable of inducing noise current in nearby conductors. Ground all appropriate units and cable shields.

Connection to a computer

If the laser scan micrometer is to be connected to an external personal computer via the RS-232C interface, ensure that the cable connections conform to the specification.

Laser safety

Mitutoyo laser scan micrometers use a low-power visible laser for measurement. The laser is a CLASS 2 EN/IEC60825-1 (2007) device. Warning and explanation labels, as shown below, are attached to the laser scan micrometers as appropriate.




Re-assembly after removal from the base


Observe the following limits when re-assembling the emission unit and reception unit to minimize measurement errors due to misalignment of the laser's optical axis with the reception unit.

Alignment within the horizontal plane

- a. Parallel deviation between reference lines C and D: X (in the transverse direction)

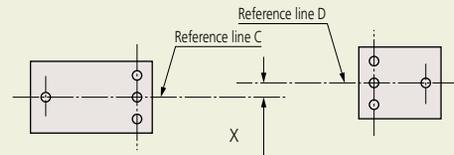


- b. Angle between reference lines C and D: θ_x (angle)

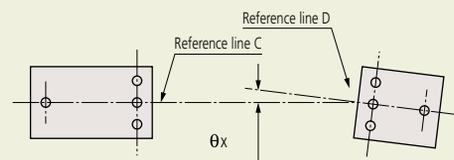


Alignment within the vertical plane

- c. Parallel deviation between reference planes A and B: Y (in height)

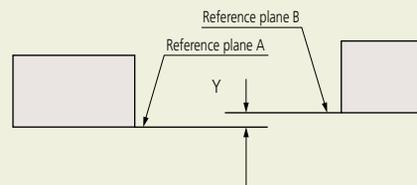

- d. Angle between reference planes A and B: θ_y (angle)

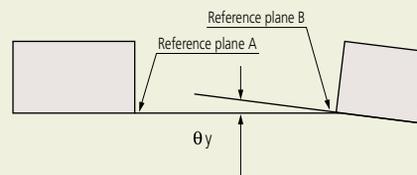

Allowable limits of optical axis misalignment

Model	Distance between Emission Unit and Reception Unit	X and Y	θ_x and θ_y
544-533, 544-534	68mm (2.68") or less	within 0.5mm (.02")	within 0.4' (7mrad)
	100mm (3.94") or less	within 0.5mm (.02")	within 0.3' (5.2mrad)
544-535, 544-536	130mm (5.12") or less	within 1mm (.04")	within 0.4' (7mrad)
	350mm (13.78") or less	within 1mm (.04")	within 0.16' (2.8mrad)
544-537, 544-538	273mm (10.75") or less	within 1mm (.04")	within 0.2' (3.5mrad)
	700mm (27.56") or less	within 1mm (.04")	within 0.08' (1.4mrad)
544-539, 544-540	321mm (12.64") or less	within 1mm (.04")	within 0.18' (3.6mrad)
	700mm (27.56") or less	within 1mm (.04")	within 0.08' (1.4mrad)
544-541, 544-542	800mm (31.50") or less	within 1mm (.04")	within 0.09' (1.6mrad)